

# Instruction Manual



KONGSBERG

## MBR 144

### Maritime Broadband Radio







KONGSBERG

***MBR 144***  
***Maritime Broadband Radio***  
***Instruction Manual***

G210-34/3

March 2022 © Kongsberg Seatex AS

## Document information

- Product: MBR 144
- Document: Instruction Manual
- Document part number: G210–34
- Revision: 3

## Copyright

*The information contained in this document remains the sole property of Kongsberg Seatex AS. No part of this document may be copied or reproduced in any form or by any means, and the information contained within it is not to be communicated to a third party, without the prior written consent of Kongsberg Seatex AS.*

## Warning

***The equipment to which this manual applies must only be used for the purpose for which it was designed. Improper use or maintenance may cause damage to the equipment and/or injury to personnel. You must be familiar with the contents of the appropriate manuals before attempting to operate or work on the equipment.***

***Kongsberg Seatex disclaims any responsibility for damage or injury caused by improper installation, use or maintenance of the equipment.***

## Disclaimer

*Kongsberg Seatex AS endeavours to ensure that all information in this document is correct and fairly stated, but does not accept liability for any errors or omissions.*

## Support information

If you require maintenance or repair, contact Kongsberg Maritime's support organisation. You can contact us using the following address: [km.support.seatex@km.kongsberg.com](mailto:km.support.seatex@km.kongsberg.com). If you need information about our other products, visit <http://www.kongsberg.com>.

## Table of contents

<b>ABOUT THIS MANUAL.....</b>	<b>7</b>
<b>MBR 144.....</b>	<b>8</b>
System description.....	8
System diagram.....	9
Scope of supply.....	10
Restrictions in guarantee.....	10
Radio frequency license.....	10
Equipment identification.....	11
FCC compliance statement.....	11
ISED Canada compliance statement.....	11
Exposure statement.....	12
Health and safety.....	12
Network security.....	12
Support information.....	13
<b>OPERATION.....</b>	<b>14</b>
Getting started.....	14
Turning on the Radio Unit.....	14
Enabling contact with the Radio Unit.....	15
Defining the IP address on the computer's network adapter.....	16
Operating procedures.....	18
Setting up the radio site for operation.....	18
Joining a wireless network.....	22
Editing an existing radio network.....	23
Adding or removing equipment.....	25
Enabling the embedded MBR link crypto.....	26
Checking the status of the MBR network.....	27
User preference procedures.....	28
Selecting colour palette for display.....	28
User interface.....	29
Operational principles.....	29
Display organisation.....	29
Display views.....	30
Functions and dialog boxes.....	35
Menu system.....	36
MBR Configuration Wizard.....	37
Configuration guide.....	37
Create site.....	38

Add radios to site.....	39
Configure site .....	40
Local Host List .....	42
Status .....	43
Edit network .....	44
Resource management.....	45
Join network .....	47
Crypto key configuration .....	47
System status .....	48
Network status.....	48
Individual radio site status.....	49
<b>INSTALLATION .....</b>	<b>50</b>
Preparations.....	50
Mechanical drawings.....	50
Necessary tools and equipment .....	51
Radio Unit location .....	51
Installing the Radio Unit.....	51
Cable layout and interconnections .....	53
Setting to work summary .....	53
<b>DRAWINGS.....</b>	<b>54</b>
About drawings.....	54
Radio Unit dimensions.....	55
<b>TECHNICAL SPECIFICATIONS.....</b>	<b>56</b>
Performance specifications .....	56
Interface specifications.....	56
Environmental specifications .....	57
Weights and outline dimensions .....	57
Power specifications.....	57
Frequency specifications.....	58
Standards and regulations .....	58
Manufacturer's conformity declaration .....	60
<b>MAINTENANCE .....</b>	<b>61</b>
Checking the product version .....	61
Cleaning the Radio Unit cover.....	61
Repairing the Radio Unit .....	62
<b>EQUIPMENT HANDLING.....</b>	<b>63</b>
Taking delivery .....	63
Unpacking and handling .....	63
Storage .....	64

Disposal .....	64
----------------	----





# About this manual

## **Purpose of manual**

The purpose of this manual is to provide the descriptions and procedures required to install, configure, operate and maintain the MBR 144.

## **Target audience**

This publication is intended for all users of the MBR 144 system. This includes project engineering personnel, installation personnel, IT administrators and operators.

## **License information**

The MBR 144 is not subject to product licensing. The product is a radio transmitting device. A frequency license is required for operation.

## **Maintenance purposes**

This manual is also intended as reference material for the maintenance personnel. Keep this manual for later use.

## **Software version**

The **Operation** chapter in this document is for Maritime Broadband Radios with software version 2.18 or higher.

This document describes the web interface configuration. For use of API (Application Programming Interface), refer to the API documentation.

# MBR 144

## Topics

[System description, page 8](#)

[System diagram, page 9](#)

[Scope of supply, page 10](#)

[Restrictions in guarantee, page 10](#)

[Radio frequency license, page 10](#)

[Equipment identification, page 11](#)

[FCC compliance statement, page 11](#)

[ISED Canada compliance statement, page 11](#)

[Exposure statement, page 12](#)

[Health and safety, page 12](#)

[Network security, page 12](#)

[Support information, page 13](#)

## System description

The MBR 144 is a Maritime Broadband Radio (MBR). It is a part of the Maritime Broadband Radio (MBR) product family of real-time steerable phased array digital radio units. It is developed for use in maritime applications where reliable communication and data transfer are crucial for efficient and safe operations. The MBR 144 is designed for installation on small manned and unmanned vessels.

The MBR 144 is an Ethernet based radio that requires no extra infrastructure to operate. It operates on OSI layer 2 as a network bridge transporting IP packets over the air interface connecting computers, sensors and systems together. The radio has a TDMA access protocol with user configurable time slot allocation. The MBR 144 supports Internet Protocol version 4.


A *radio network* is a network of several MBR Units communicating together. The radio network operates as a wireless radio mobile ad hoc network (MANET) which can be used as a stand-alone network or as an extension of your existing radio network, or fixed networks. The radio network is defined by network name, network id and encryption key. The MBR 144 can be used together with all other MBR Units in the product family.

A *radio site* is one or several radio units connected together by a local Ethernet connection at the same location. The benefits of a radio site with several radio units is an increased coverage area or redundancy with radios covering the same area. Data links to remote MBR units will seamlessly be handed over from one Radio Unit to another Radio Unit on the same radio site.

All antennas, radio transceivers and signal processing are contained in the radio unit.

The MBR 144 is set up via a web interface which is available on each radio unit. It can also be set up from an API (application programming interface). Contact Kongsberg Seatex AS for information on API.

## System diagram

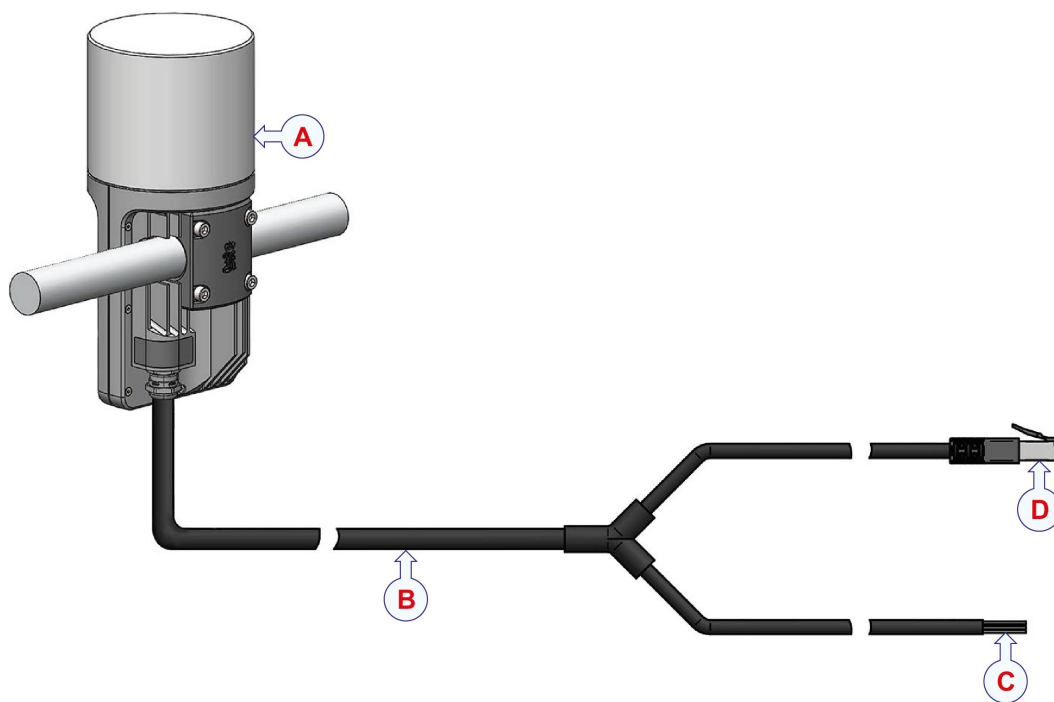

- A** *Radio Unit*
- B** *Combined Ethernet and power cable*
- C** *Connection to power source on vessel*
- D** *Ethernet connection to user equipment*

## Scope of supply

The basic items are included in the delivery. Additional optional items can be purchased from Kongsberg Seatex AS.

### Basic items

- 1 ea Radio Unit
- 1 ea Combined Ethernet and power cable, 10 m
- 1 ea End-user documentation

### Additional required items

Observe these additional items which are required for installation and/or operation. They can be ordered from Kongsberg Seatex AS, or another Kongsberg office, or purchased locally.

- Power supply
  - Computer
- For configuration purposes.

## Restrictions in guarantee

Changes or modifications to the product not explicitly approved by Kongsberg Seatex AS will void the guarantee.

The liability of Kongsberg Seatex AS is limited to repair of this product only under the given terms and conditions stated in the sales documents. Consequential damages such as customer's loss of profit or damage to other systems traceable back to this product's malfunctions, are excluded.

The warranty does not cover malfunctions of the product resulting from the following conditions.

- Incorrect power connection.

## Radio frequency license

This product contains a radio transmitting device. A frequency license for the use of radio frequencies is required for operation. Use in national waters will require a frequency license issued by the relevant national authorities. The owner and user of the equipment are responsible for obtaining such a license prior to switching the product ON.

This product is in compliance with the standard ETSI EN 303 276. This applies to the frequency channels 5862 and 5890 MHz.

This product is in compliance with FCC (Federal Communications Commission) Part 15.407. This applies to the frequency band 5725 to 5850 MHz.

**Related topics**

[Frequency specifications, page 58](#)

## Equipment identification

This product has the following identifications for FCC (Federal Communications Commissions) and IC (Industry Canada).

- **FCC ID:** Q8IM144M2FIX
- **IC:** 5637A-M144M2FIX

## FCC compliance statement

This device complies with Part 15 of the FCC (Federal Communications Commission) Rules. Operation of the device is subject to the following conditions.

- 1 This device may not cause harmful interference.
- 2 This device must accept any interference received. Including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a marine and/or commercial environment. This equipment generates, uses and can radiate radio frequency energy. If not installed and used in accordance with the instructions, the equipment may cause harmful interference to radio communication. The equipment is not intended for operation in a residential area. Operation in such an area is likely to cause harmful interference. In which case the user will be required to correct the interference at his own expense.

Changes or modifications not expressly approved by the party responsible for compliance, could void the user's authority to operate the equipment.

## ISED Canada compliance statement

Text in English

This device complies with Industry Canada (IC) license-exempt RSS standard(s). Operation is subject to the following two conditions.

- 1 This device may not cause interference.
- 2 This device must accept any interference, including interference that may cause undesired operation of the device.

#### Texte en Français

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes.

- 1 L'appareil ne doit pas produire de brouillage.
- 2 L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillard est susceptible d'en compromettre le fonctionnement.

## Exposure statement

To comply with FCC or IC RF exposure limits for general population or uncontrolled exposure, the antenna(s) used for this transmitter must be installed on outdoor permanent structures in order to provide a separation distance at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

This product contains a radio transmitting device. According to the output power of the equipment, the minimum distance for human beings in a controlled environment is:

- **Maximum power/ETSI EN 303 276:** 40 cm
- **FCC part 15.407:** 20 cm

## Health and safety

Operation or troubleshooting of this equipment will not imply any risk for high voltages, explosions or exposure to gas. The equipment complies with IEC 61010-1/EN 61010-1 standards regarding product safety.

## Network security

If a MBR 144 system is connected to a local area network, data security is important.

Equipment manufactured by Kongsberg Seatex is frequently connected to the vessel's local area network (LAN). When you connect a computer to a local area network you will always expose the data on that computer. All other computers connected to the same network may be able to access your data. Several threats may immediately occur:

- Remote computers can read the data.

- Remote computers can change the data.
- Remote computers can change the behavior of the computer, for example by installing unwanted software.

Usually, two parameters are used to define the threat level:

- 1 The likelihood that any remote computer will do any of the above.
- 2 The damage done if a remote computer succeeds doing this.

Kongsberg Seatex has no information regarding the complete system installation on any vessel. Systems provided by Kongsberg Seatex are regarded as stand-alone offline systems. They are stand-alone even though they may be connected to a network for sensor interfaces and/or data distribution.

---

**Note**

*No network safety applications are installed on Kongsberg Seatex computers. The computers are therefore not protected against viruses, malware or unintentional access by external users.*

---

Securing the MBR 144 system itself has no meaning unless there is a policy in place that secures all computers in the network. This policy must include physical access by trained and trusted users. The customer/end user of the MBR 144 system will always be in charge of defining and implementing a security, policy and providing the relevant network security applications.

---

**Note**

*Kongsberg Seatex will not accept any responsibility for errors and/or damages caused by unauthorized use of or access to the MBR 144.*

---

## Support information

If you need technical support for your MBR 144 system you must contact your local dealer, or one of our support offices.

- **Company name:** Kongsberg Seatex AS
- **Address:** Havnegata 9, 7010 Trondheim, Norway
- **Telephone:** +47 73 54 55 00
- **Telephone, 24h support:** +47 33 03 24 07
- **E-mail address:** [km.support.seatex@km.kongsberg.com](mailto:km.support.seatex@km.kongsberg.com)
- **Website:** <http://www.kongsberg.com/maritime>

# Operation

## Topics

[Getting started, page 14](#)

[Operating procedures, page 18](#)

[User preference procedures, page 28](#)

[User interface, page 29](#)

[Functions and dialog boxes, page 35](#)

## Getting started

### Topics

[Turning on the Radio Unit, page 14](#)

[Enabling contact with the Radio Unit, page 15](#)

[Defining the IP address on the computer's network adapter, page 16](#)

## Turning on the Radio Unit

The Radio Unit is turned on when the power connector is inserted in the power source on the vessel. The system power is controlled from the power source.

### Context

The software is pre-installed and the system will start automatically after it has been turned on.

### Procedure

- 1 Make sure that the Ethernet cable is properly connected.



- 2 Insert the power connector into the power source on the vessel. 24 V DC.
- 3 To turn off the Radio Unit, simply remove the power connector.

### Result

The system is now ready for configuration.

### Related topics

[Enabling contact with the Radio Unit, page 15](#)

[Defining the IP address on the computer's network adapter, page 16](#)

[Setting to work summary, page 53](#)

## Enabling contact with the Radio Unit

To be able to set up and communicate with the Radio Unit you must enable contact with the unit via a browser.

### Prerequisites

In order to set up the Radio Unit you need these items.

- Computer with an Ethernet adapter.
- Up-to-date browser. For example Chrome or Firefox.

The IP address of the Radio Unit is found on a label at the rear of the unit.

You must define which IP Address and Subnet mask the Ethernet adapter in the computer shall use for this communication.

### Context

You only need the computer for configuration or re-configuration purposes.

### Note


---

*The **MBR Configuration Wizard** page only appears the first time you set up your site. After the configuration is completed, the web interface takes you directly to the **Main** view.*

---

### Procedure

- 1 Set up the computer with:
  - **IP Address:** 10.19.127.10
  - **Subnet mask:** 255.255.0.0
- 2 Connect the computer to the Radio Unit via Ethernet.
- 3 Type the IP address of the Radio Unit in the browser address bar.  
Observe that the **MBR Configuration Wizard** page appears.

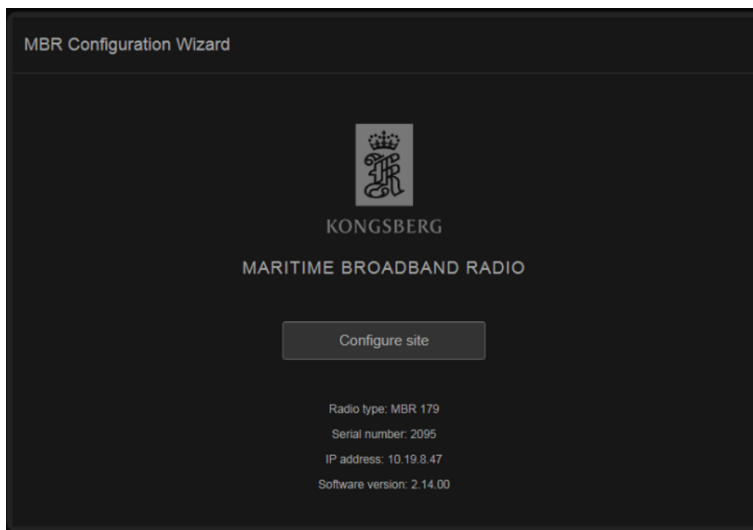

For previously configured systems the **Main** view appears.

## Result

You are now connected to the web interface on your local radio.

## Related topics

[Turning on the Radio Unit, page 14](#)

[Defining the IP address on the computer's network adapter, page 16](#)

[Setting up the radio site for operation, page 18](#)

[MBR Configuration Wizard, page 37](#)

[Setting to work summary, page 53](#)

## Defining the IP address on the computer's network adapter

You must define which IP Address and Subnet mask the Ethernet adapter in the computer shall use for this communication. As long as you do not replace the computer or the network adapter, you only need to do this once.

## Prerequisites

This procedure is made for the Microsoft® Windows® 7 and 10 operating systems. It is assumed that you are familiar with the Windows® operating systems, computer technology, and interface principles.

## Procedure

- 1 Close all the programs that are running on the computer.
- 2 Open the **Network Connections** dialog box.

This procedure is made for the Microsoft® Windows® 10 operating system.

- a In the bottom-left corner of your desktop, select the Windows® search function.

- b In the search box, type "Network Connections", and open the **Network Connections** dialog box.
- c Right-click the network adapter you are going to use and select **Properties** on the shortcut menu.
- d On the list of connections, select **Internet Protocol 4 (TCP/IPv4)**, and then **Properties**.

This procedure is made for the Microsoft® Windows® 7 operating system.

- a In the bottom-left corner of your desktop, select the Windows® **Start** button.
  - b On the right-hand side of the **Start** menu, select **Control Panel**.
  - c Observe that the Control Panel opens.
  - d Select **Network and Sharing Center**.  
(If the Control Panel is shown with categories, select **View network status and tasks**.)
  - e On the left-hand menu, select **Change adapter settings**.
  - f Click once on your network adapter to select it, then right-click and select **Properties** on the shortcut menu.
  - g On the list of connections, select **Internet Protocol 4 (TCP/IPv4)**, and then **Properties**.
- 3 Select **Use the following IP address**, and type the IP address and network mask.
- IP Address: **10.19.127.10**
  - Subnet mask: **255.255.0.0**
- 4 Select **OK** to save the selected settings, and then close all the dialog boxes.

#### **Related topics**

[Turning on the Radio Unit, page 14](#)

[Enabling contact with the Radio Unit, page 15](#)

[Setting up the radio site for operation, page 18](#)

[Setting to work summary, page 53](#)

# Operating procedures

## Topics

[Setting up the radio site for operation, page 18](#)

[Joining a wireless network, page 22](#)

[Editing an existing radio network, page 23](#)

[Adding or removing equipment, page 25](#)

[Enabling the embedded MBR link crypto, page 26](#)

[Checking the status of the MBR network, page 27](#)

## Setting up the radio site for operation

The setup is done using a wizard. The **MBR Configuration Wizard**. A *radio site* is one or several radio units connected together by a local Ethernet connection at the same location. A *radio network* is a wireless network of radio sites. You must set up the radio site before you can start the radio network configuration. All configuration of the MBR 144 Maritime Broadband Radio (MBR) is done through the web interface.

## Prerequisites

The IP address for the Radio Unit is located on a label at the rear of the unit. You must have enabled contact with the Radio Unit.


The IP address and the MAC address for the third party equipment must be known.

## Context

The MBR 144 Maritime Broadband Radio (MBR) uses static layer 2 bridging (OSI model - Open Systems Interconnection Basic Reference Model). It needs both the IP address and the MAC address of the equipment in order to establish an IP connection over the wireless network.

## Procedure

- 1 On the **MBR Configuration Wizard** page, which appears after you have enabled contact with the Radio Unit, select **Configure site** to start the installation wizard.

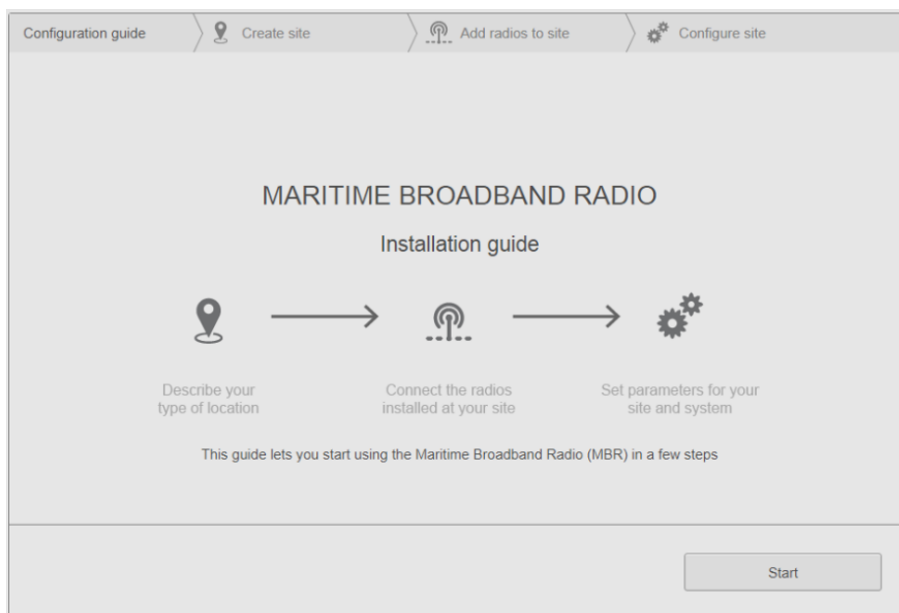

## Note

*The default colour palette setting is with dark background. If your current light conditions require white background, select the white colour palette in the **Palette** group.*

- 2 Select **Start** on the **Configuration guide** page to start the step-by-step configuration of your radio site.

- 3 Type a suitable name for your radio site and select **Continue**.

The screenshot shows the 'Create site' step in a configuration guide. The breadcrumb trail at the top is 'Configuration guide > Create site > Add radios to site > Configure site'. The main text says: 'A radio site is one or several radio units connected together by Ethernet on one location. Enter a name for your site (e.g. name of your vessel)'. Below this is a text input field labeled 'Name of site' containing the text 'MS Vessel'. At the bottom are 'Back' and 'Continue' buttons.

- 4 Select the radios you want to add to the site. Type a description of the location of the Radio Unit. Select **Continue**.

**Note**

*Radio units connected on the local Ethernet will appear automatically. They are by default selected.*

The screenshot shows the 'Add radios to site' step. The breadcrumb trail is 'Configuration guide > Create site > Add radios to site > Configure site'. The site name 'MS Vessel' is shown at the top. The instruction says: 'Select the radios you would like to add to your site'. Below is a table of available radios:

Available radios	Description
<input checked="" type="checkbox"/> MBR 189 Snr. 8888	<input type="button" value="Details"/> <input type="text" value="Port"/>
<input checked="" type="checkbox"/> MBR 179 Snr. 9999	<input type="button" value="Details"/> <input type="text" value="Mast"/>

At the bottom are 'Back' and 'Continue' buttons.

- 5 Type the radio frequency. Select the data rate for the radio site from the **Rate** list.

The screenshot shows the 'MS Vessel' configuration window. At the top, there are four tabs: 'Configuration guide', 'Create site', 'Add radios to site', and 'Configure site'. The 'Configure site' tab is active. On the left, there are two input fields: 'Frequency [MHz]' with the value '5862' and 'Rate [Mbps]' with a dropdown menu showing '8.5'. In the center, there are two radio entries: 'Port' (MBR 189 Snr. 8888) and 'Mast' (MBR 179 Snr. 9999), each with a 'Details' button. On the right, there is a table titled 'Local Host' with columns 'Local Host' and 'IP'. The table contains two rows: 'Radio 2095' with IP '10.19.8.47' and 'MBR Config PC' with IP '10.19.0.5'. Below the table is a 'Manage Local Host List' button. At the bottom of the window are three buttons: 'Back', 'Cancel', and 'Finish'.

Local Host	IP
Radio 2095	10.19.8.47
MBR Config PC	10.19.0.5

- 6 Select **Manage Local Host List** to open the **Local Host List** dialog box. This is where you add the equipment to your radio site which shall be available in the wireless network.

The screenshot shows the 'Local Host List' dialog box. It has a title bar with a close button. Inside, there are four input fields: 'IP address' (with a dropdown showing '--'), 'Type' (with a dropdown showing 'Generic'), 'Description (Optional)' (with a text input field), and 'MAC address' (with a radio button and a 'MAC' button). Below these fields is an 'Add' button. At the bottom, there is a 'Check stored MAC' button and a 'Close' button. The main area of the dialog box contains a table with the following data:

IP address	Type	Description (Optional)	MAC address
10.19.8.47	Radio	Radio 2095	<input checked="" type="radio"/> x
10.19.0.5	PC	MBR Config PC	<input checked="" type="radio"/> x

- 7 Type the IP address of the equipment you want to connect. Select type of equipment from the **Type** list. Type a description of the equipment for identification purposes.

If the equipment is switched on, the MAC address appears automatically. If not, type the MAC address. Select **Add** to add the equipment.

**Note**

---

*You can add and/or change information later by selecting the equipment, making the changes and selecting **Update**. You can also delete equipment by selecting the **X** symbol at the end of the line.*

---

- 8 Continue for all the equipment you want to add. Select **OK** to save the selected setting and close the dialog box.
- 9 Select **Finish** to complete your radio site configuration.

**Result**

The **Main** view appears and you are now ready to start using the radios.

**Related topics**

[Enabling contact with the Radio Unit, page 15](#)

[Defining the IP address on the computer's network adapter, page 16](#)

[Configuration guide, page 37](#)

[Create site, page 38](#)

[Add radios to site, page 39](#)

[Configure site, page 40](#)

[Setting to work summary, page 53](#)

## Joining a wireless network

You must join the wireless network which you want your site to be a part of. If another radio site has created a new wireless network, you might want to join this network.


**Context**

If you are out of range of the wireless network at the time you carry out this procedure, the radio will automatically detect the wireless network and establish a connection when you are within reach of this network.



## Procedure

- 1 On the **System** menu —> **Network**, select **Join** to open the **Join network** dialog box.

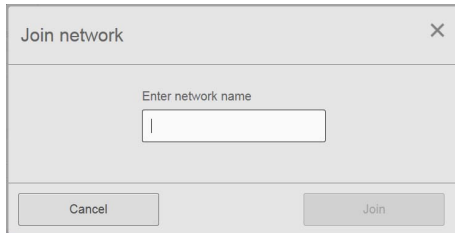A screenshot of a 'Join network' dialog box. The dialog has a title bar with the text 'Join network' and a close button (X). Inside the dialog, there is a label 'Enter network name' above a text input field. At the bottom of the dialog, there are two buttons: 'Cancel' on the left and 'Join' on the right.

- 2 Type the name of the wireless network you want to join.

### Note

*The wireless network name is in upper case.*

- 3 Select **Join** to join the wireless network.

## Related topics

[Setting to work summary, page 53](#)

[Join network, page 47](#)

## Editing an existing radio network

During operation you might want to administer and make changes to the wireless network. If a new site has been established or you want to change the distribution of resources.

## Prerequisites

A wireless network must have been set up previously.

## Context

The site ID is equal to the serial number of the Radio Unit. For multiple-panel sites, the site ID is equal to the lowest serial number.

**Procedure**

- 1 On the **System** menu —> **Network**, select **Edit** to open the **Edit network** dialog box.

The screenshot shows the 'Edit network' dialog box. It is divided into two panes. The left pane, titled 'Parameters', contains a 'Network' dropdown menu currently showing 'MBR-NET' and an 'Open resource [%]' input field with the value '0'. The right pane, titled 'Participants', has an 'Add by site ID' section with a text box 'Enter site ID' and an 'Add' button. Below this is a table with the following data:

Site	Resource distribution
MS Vessel (You)	50%
MS Boat	50%

The 'MS Boat' row has a small 'x' icon to its right. At the bottom of the dialog are three buttons: 'Resource management', 'Cancel', and 'Update'.

- 2 If you want, type a new site name in the **Add by site ID** box. Select **Add** to add a new site to the existing network.
- 3 If you want to change the bandwidth resources, or the superframe length for the wireless network, select **Resource management** to enter the **Resource management** dialog box.
- If you want to adjust the superframe, type the wanted **Superframe length**. Type the wanted **Resource distribution** in the Site list.

**Note**

*For Superframe length it is recommended to use 50 – 100 ms. However, for special applications the superframe can be adjusted. This will affect the data throughput.*

- 4 Select **OK** to store the bandwidth settings and return to **Edit network**.
- 5 Select **Update** to save the network settings.

**Related topics**

[Edit network, page 44](#)

[Resource management, page 45](#)

If you want to communicate with other types of equipment, for example sensors, you can add this equipment to your radio site. When third party equipment is no longer in use on your site, you can remove it.

- 1 On the **System** menu, select **Site** to enter the **Configure site** page.
- 2 Select **Manage Local Host List** to open the **Local Host List** dialog box.

Local Host List

IP address

Type

Description (Optional)

MAC address

--

Generic

--

MAC

Add

10.19.8.47	Radio	Radio 2095	<div></div>
10.19.0.5	PC	MBR Config PC	<div></div>

Check stored MAC

Close

- 3 Type the IP address of the equipment you want to connect. Select type of equipment from the **Type** list. Type a description of the equipment for identification purposes. If the third party equipment is switched on, the MAC address appears automatically. If not, type the MAC address.  
Select **Add** to add the equipment.
- 4 To remove equipment, select the X symbol at the end of the line.
- 5 Continue for all the equipment you want to add or remove. Select **OK** to close the dialog box.
- 6 Back to the **Configure site** page. Select **OK** to save the chosen settings.


Local Host List, page 42

## Enabling the embedded MBR link crypto

Here you can generate, upload or download the symmetrical crypto keys for the MBR embedded link crypto. The same crypto key must be entered on all radios in the same wireless network so the radios can communicate with each other.

### Context

The crypto key length is 56 bits. The crypto key can be set to **infinite** duration or a time specific duration. The **Volatile** option specifies whether the key is stored in the MBR configuration indefinitely, or if the key is lost on the next power cycle, or until the key is re-configured.

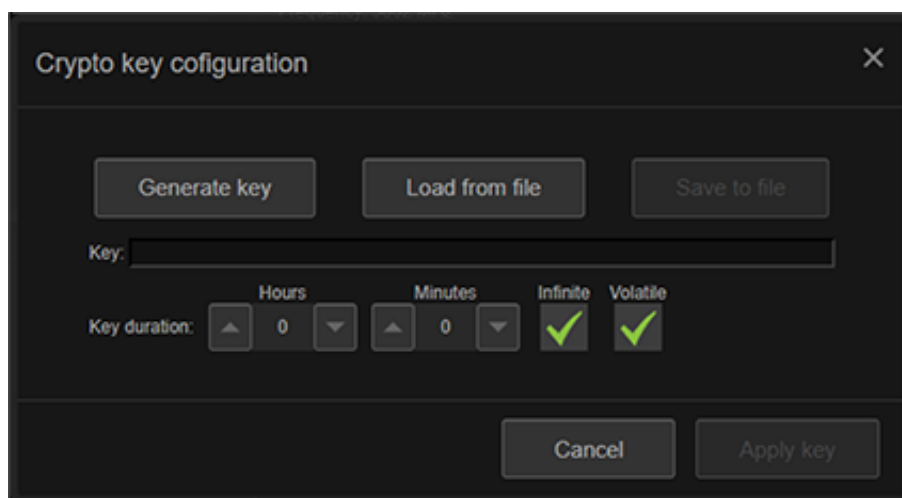

### Procedure

- 1 On the **System** menu, select **Crypto**.
- 2 Select **Generate key** if you want to generate a new key. Select **Load from file** if you want to upload a crypto key from a text file.
- 3 Set a specific duration for the crypto key or select **Infinite** if you do not want an expiry date for the key.
- 4 Select **Volatile** if you want indefinite storage of the key.
- 5 Select **Apply key** to save the setting.

### Related topics

[Crypto key configuration](#) , page 47

## Checking the status of the MBR network

During operation you can check the status of the local radio site, the remote site(s) and the entire network of radio sites.

### Prerequisites

The radio site(s) must have been set up for operation. If not, there is no status information to display.


### Context

The status information is located to the left of the Main view. It is easily visible to the operator.

### Procedure


- 1 Look at the system status information to view the status about your local site.

The status is **Active** when the radio site is set up for operation. The status is **Not configured** when the radio site is not set up for operation.

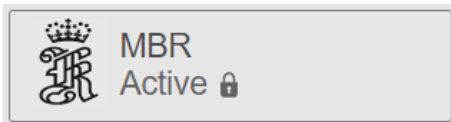


- 2 Look at the network information to view the status of the current radio network.

The current name and the frequency of the network are displayed.

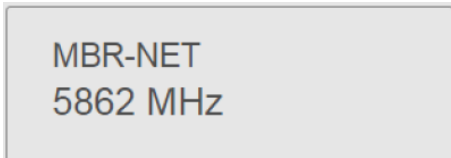


- 3 Look at the **Site list** to view information about each site in the radio network.

The **Site list** holds information about your local site and remote radio sites.

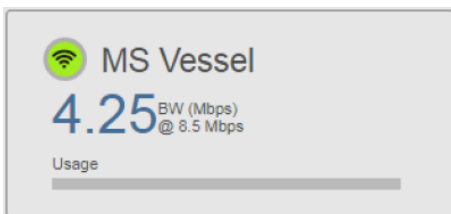

**BW** indicates the bandwidth resource allocated to the local radio site. The **Usage** bar indicates the instantaneous usage of the bandwidth resource.

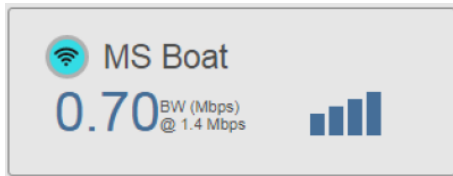

**BW** indicates the bandwidth resource allocated to the remote radio site. The signal strength bar indicates the signal strength of each local site.

### Related topics

[System status, page 48](#)

[Network status, page 48](#)

[Individual radio site status, page 49](#)

[Display organisation, page 29](#)

## User preference procedures

### Topics

[Selecting colour palette for display, page 28](#)

### Selecting colour palette for display

You can select a colour scheme for the display which suits your current light conditions.

#### Context

The **Palette** function provides colour schemes for the display presentation. Two palettes are available. Day black and Day white.



#### Procedure

- 1 Select **Palette** on the **System** menu.
- 2 Select the colour scheme you want to use.

# User interface

## Topics

[Operational principles, page 29](#)

[Display organisation, page 29](#)

[Display views, page 30](#)

## Operational principles

The MBR 144 has a graphical configuration and user interface. Use a mouse and keyboard to navigate, select and operate the system.


The MBR 144 is operated and configured from the **System** menu.

## Related topics

[Menu system, page 36](#)

## Display organisation

The display is made up of five main parts. Information boxes with information about the status of the overall system, the networks and the radio sites to the left. A **System menu**, from which you operate and configure the system, at the top. Below the **System menu** various views will appear, depending on which of the information boxes to the left are selected. These views contain more detailed information about the overall system, the networks and the local radio sites.

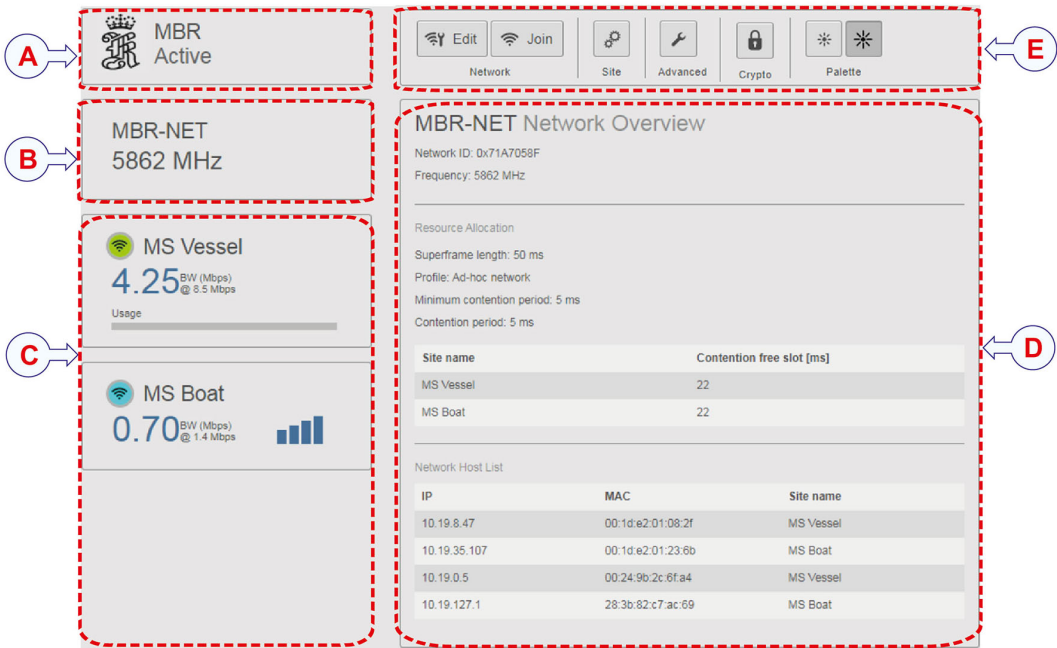

- A** **System status:** *It shows the overall radio system status.*
- B** **Network information:** *It shows the name and frequency of the current network.*
- C** **Site list:** *A list of radio sites in the current network.*
- D** **Status information views:** *Three views may appear here, depending on which box is selected to the left. System Overview, Network Overview or Local Site information.*
- E** **System menu:** *It provides various system settings and operational functions.*

### Related topics

[Checking the status of the MBR network, page 27](#)

## Display views

### Topics

[System Overview view, page 31](#)

[Network Overview view, page 32](#)

[Local Site view, page 33](#)




## System Overview view

The *System Overview* view shows all sites in the wireless network. It also shows the radio serial number, signal margin, distance and data age for every site.

### How to open

Select the **System status** box to the left in the **Main** view.

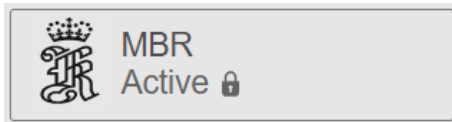

### Example

System Overview				
Remote sites on network				
<input type="checkbox"/> Expand multipanel sites				
Site name	Serial number	Signal margin [dB]	Distance [m]	Age [s]
MS Boat	9067	65.9	7.5	0.10

## Details

### Expand multipanel sites

This option applies to sites with more than one Radio Unit (panel). Select this option to show more information about the other Radio Units which belong to this multipanel site.

### Site name

This is the name of the remote radio sites in the network.

### Serial number

This is the serial number of the radios on each individual remote site.

### Signal margin [dB]

This is the receiver signal margin for the remote radio site (s).

### Distance [m]

This is the distance in metres to the remote radio site(s).

### Age [s]


This is the age of the data which are shown for this site.

Network Overview view

The *Network Overview* view is useful to monitor details about the wireless network. It shows the network parameters and the Network Host List. The Network Host List is the combination of all the Local Host Lists in the wireless network.

How to open

Select the **Network status** box to the left in the **Main** view.

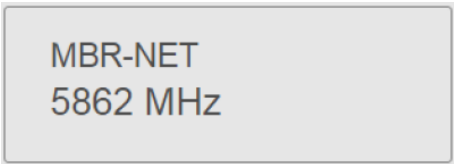

Example

MBR-NET Network Overview

Network ID: 0x71A7058F  
Frequency: 5862 MHz

Resource Allocation

Superframe length: 50 ms  
Profile: Ad-hoc network  
Minimum contention period: 5 ms  
Contention period: 5 ms

Site name	Contention free slot [ms]
MS Vessel	22
MS Boat	22

Network Host List

IP	MAC	Site name
10.19.8.47	00:1d:e2:01:08:2f	MS Vessel
10.19.35.107	00:1d:e2:01:23:6b	MS Boat
10.19.0.5	00:24:9b:2c:6f:a4	MS Vessel
10.19.127.1	28:3b:82:c7:ac:69	MS Boat

Details

Network ID

This is the hexadecimal value of the network name used for identifying that each radio is on the same logical network.

**Frequency**

This is the configured operating frequency of the network.

**Superframe length**

This is the length of the repeating superframe of bandwidth allocation in milliseconds.

**Profile**

This is the current network profile.

**Minimum contention period**

This is the minimum contention period in the superframe. It shows the percentage of the bandwidth which is an open resource. Open resource is a contention-based multiple access protocol which allows radio sites to communicate without having a fixed allocated time slot.

**Contention period**

It shows the contention period in milliseconds. Contention period is also called Open period, and is a contention-based multiple access protocol which allows radio sites to communicate without having a fixed allocated time slot.

**Site name**

This is the name of the radio sites in the wireless network.

**Contention free slot [ms]**

This is the reserved transmission time for a radio site.

**IP**

This is the IP (internet protocol) address of the equipment in the Network Host List.

**MAC**


This is the MAC (media access control) address of the equipment in the Network Host List.

**Local Site view**

The *Local Site* view is useful to monitor information about the local radio site. It shows local site setup parameters and information about sent and received datagrams.

**How to open**

Select the **Local site** box to the left in the **Main** view.

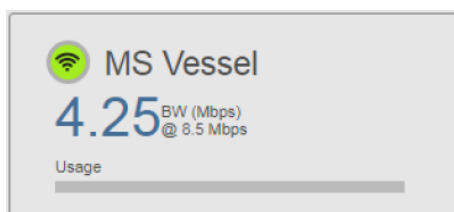

## Example

MS Vessel Local Site

Radios on site: 9194

Data rate [Mbps]	Contention free slot length [ms]	Crypto status	Relay
8.5	47	Bypass	Off

Transmit Status

Transmit utilisation [%]	Transmit [kbps]	Sent IP frames	Sent wireless headers	Transmit busy
0	0	1080	1080	0

Frames Dropped

No link	Link busy	MAC busy
0	0	0

Received Status

Received headers	Received datagrams	Checksum errors
0	0	0

## Details

### Data rate [Mbps]

This is the configured data rate.

### Contention free slot length [ms]

This is the configured reserved transmission time for the local site.

### Crypto status

This is the status of the link crypto functionality.

### Relay

This shows the status of the relay functionality for this site, if the relay functionality has been enabled.

### Transmit utilisation [%]

This is the current transmission utilisation percentage of the allocated resource (contention free slot).

### Transmit [kbps]

This is the current transmission in kbps.

### Sent IP frames

This is the number of sent IP frames from this site.

**Sent wireless headers**

This is the number of wireless frames sent from this site (IP frames and management data).

**Transmit busy**

This shows the number of datagrams currently in queue for transmission.

**No link**

This shows the frames which have not been sent due to no link.

**Link busy**

This shows the frames which have not been sent due to a full transmission queue.

**MAC busy**

This shows the frames which have not been sent due to a busy MAC (media access control) controller.

**Received headers**

This is the counter for received wireless headers.

**Received datagrams**

This is the counter for received decoded datagrams.

**Checksum errors**

This is the counter for Checksum errors.

## Functions and dialog boxes

**Topics**

[Menu system, page 36](#)

[MBR Configuration Wizard, page 37](#)

[Configuration guide, page 37](#)

[Create site, page 38](#)

[Add radios to site, page 39](#)

[Configure site, page 40](#)

[Local Host List, page 42](#)

[Status, page 43](#)

[Edit network, page 44](#)

[Resource management, page 45](#)

[Join network, page 47](#)

[Crypto key configuration , page 47](#)


[System status, page 48](#)

[Network status, page 48](#)

[Individual radio site status, page 49](#)

## Menu system

The **System** menu is always visible at the top of the display. The menu provides various system settings and operational functions.

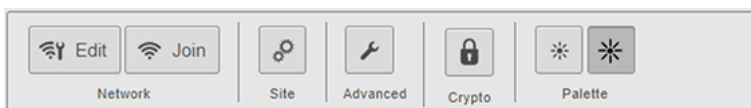

The **System** menu provides access to four groups of functions.

### Network

**Network** allows you to join an existing network or edit an existing network.

### Site

**Site** allows you to configure the radio site. Select **Site** to return to the configuration of your radio site. Here you can update the frequency, the data rate the third party equipment for the local radio site. You can also see the radio details for the radios on the local site.

### Advanced

**Advanced** contains a web page with a set of advanced functions, tuning and diagnostics. These settings are for experienced users only. They are not intended for use under normal conditions. Therefore, they are not described in this document.

### Crypto

**Crypto** opens the **Crypto key configuration**. Here you can generate, upload or download the symmetrical crypto keys for the MBR embedded link crypto.

### Palette

**Palette** provides you with colour schemes for the display presentation. Select the colour scheme which suits your light conditions.

## Related topics


[Operational principles, page 29](#)

## MBR Configuration Wizard

The **MBR Configuration Wizard** page is the start page of your radio unit configuration. It only appears when the radio site is not configured. It is either the first time the radio is started, or after configuration is reset.

### How to open

The **MBR Configuration Wizard** page appears when you have enabled contact with the radio unit via the web interface.

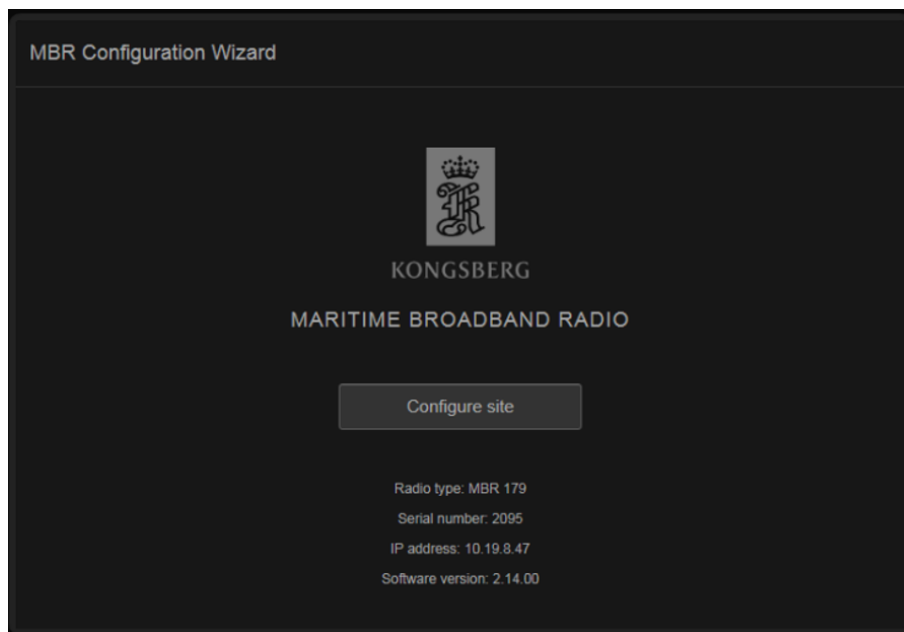

### Details

#### Configure site

Select the **Configure site** button to open the installation wizard. The wizard takes you through the step-to-step configuration of your radio site.

#### Related topics


[Enabling contact with the Radio Unit, page 15](#)

## Configuration guide

An installation wizard takes you through the setup of the radio site. The **Configuration guide** page is the first page in the step-to-step configuration of your radio site.

### How to open

Select the **Configure site** button on the **MBR Configuration Wizard** page to open the installation wizard.

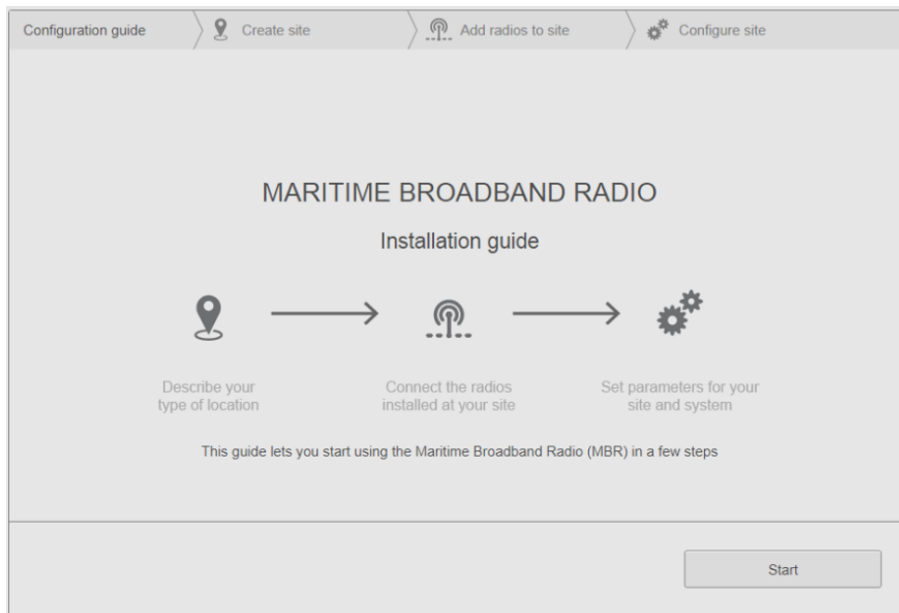

## Details

### Start

Select the **Start** button to start the step-to-step configuration of your radio site.

### Related topics

[Setting up the radio site for operation, page 18](#)

## Create site

Here you can type the name of your radio site.

### How to open

This page is step 2 in the step-to-step configuration of your radio site.



The screenshot shows a web-based configuration interface. At the top, there is a navigation bar with four steps: 'Configuration guide', 'Create site', 'Add radios to site' (which is the active step, indicated by a radio icon), and 'Configure site' (indicated by a gear icon). Below the navigation bar, the main content area has a light gray background. It contains the text: 'A radio site is one or several radio units connected together by Ethernet on one location.' followed by 'Enter a name for your site (e.g. name of your vessel)'. In the center, there is a text input field with the label 'Name of site' above it. The field contains the text 'MS Vessel'. At the bottom of the form, there are two buttons: 'Back' on the left and 'Continue' on the right.

## Details

### Name of site

Type a suitable name for your radio site. This name will be displayed in the **Site list** and in the **Network** view.

### Related topics

[Setting up the radio site for operation, page 18](#)

## Add radios to site

Here you can add radios to your radio site.

### How to open

This page is step 3 in the step-to-step configuration of your radio site.

The screenshot shows a web-based configuration interface for a radio site. At the top, there is a navigation bar with four steps: 'Configuration guide', 'Create site', 'Add radios to site' (the current step), and 'Configure site'. Below the navigation bar, the site name 'MS Vessel' is displayed. The main instruction is 'Select the radios you would like to add to your site'. There are two columns: 'Available radios' and 'Description'. Under 'Available radios', there are two entries: 'MBR 189 Snr. 8888' and 'MBR 179 Snr. 9999'. Each entry has a green checkmark icon and a 'Details' button. Under 'Description', there are two text input fields: 'Port' and 'Mast'. At the bottom of the screen, there are two buttons: 'Back' and 'Continue'.

## Details

### Available radios

This is a list of available radios. Radio units connected on the local Ethernet will appear automatically. They are by default selected.

### Details

Select the **Details** button to open the radio **Status** box. This dialog box shows the serial number, product version, configured values and diagnostics for the Radio Unit.

### Name/description

Here you can type a description of the location of the Radio Unit.

## Related topics

[Setting up the radio site for operation, page 18](#)

[Status, page 43](#)

## Configure site

Here you can set the frequency, the data rate and select third party equipment for the local radio site. You can also see the radio details for the radios on the local radio site. This is also where you make changes to the radio site setup.

## How to open

This is the last page in the step-to-step configuration of your radio site.

The screenshot shows the 'MS Vessel' configuration window. At the top, there are four tabs: 'Configuration guide', 'Create site', 'Add radios to site', and 'Configure site'. The 'Configure site' tab is active. The main area is divided into four sections:

- Frequency [MHz]:** A text box containing '5862'.
- Rate [Mbps]:** A dropdown menu showing '8.5'.
- Radios:** A list of two radios:
  - Port:** MBR 189 Snr. 8888, with a 'Details' button.
  - Mast:** MBR 179 Snr. 9999, with a 'Details' button.
- Local Host List:** A table with two columns: 'Local Host' and 'IP'. It contains two entries:
 

Local Host	IP
Radio 2095	10.19.8.47
MBR Config PC	10.19.0.5

 Below the table is a 'Manage Local Host List' button.

At the bottom of the window are three buttons: 'Back', 'Cancel', and 'Finish'.

## Details

### Frequency

This is the operating frequency of the radio site.

### Rate

This is the operating data rate of the radio site.

### Radios

This is a list of radios which are added to the radio site.

### Details

Select the **Details** button to open the radio **Status** box. This dialog box shows the serial number, product version, configured values and diagnostics for the Radio Unit.

### Local Host & IP

The **Local Host List** shows the current host name(s) and associated IP addresses in the Local Host List.

### Manage Local Host List

This button opens the **Local Host List** dialog box. Here you can manage equipment which is connected to the radio site.

## Related topics

[Setting up the radio site for operation, page 18](#)

[Local Host List, page 42](#)

[Status, page 43](#)

## Local Host List

In the **Local Host List** dialog box you can manage equipment connected to your radio site. It contains a list of equipment where the radio site provides IP connectivity in the MBR network.

### How to open

This dialog box is opened from the **Configure site** page.

Local Host List

IP address: -- Type: Generic Description (Optional): -- MAC address: ☒ MAC

Add

10.19.8.47	Radio	Radio 2095	<input checked="" type="radio"/> x
10.19.0.5	PC	MBR Config PC	<input checked="" type="radio"/> x

Check stored MAC Close

### Details

#### IP Address

This is the IP address of the equipment you want to add to your radio site.

#### Type

This is a drop-down list of various metadata information about the equipment which can be useful to add to your radio site. For example computers and motion sensors.

#### Description

Here you can type a name which describes the equipment you want to add to your radio site. When you type in this box, the **Add** button becomes active.

#### MAC address

This is the MAC (media access control) address of the equipment you want to add to your radio site. The circle becomes green when a MAC address is found

automatically for the entered IP address. Select the **MAC** button to change or view the MAC address.

#### Check store MAC

Select this button if you want to recheck the MAC address for every equipment added to the list in order to verify current status on the local network.

#### Related topics

[Adding or removing equipment, page 25](#)


[Configure site, page 40](#)

## Status

The radio **Status** box shows the serial number, product version, configured values and diagnostics for the Radio Unit.

#### How to open

This box is opened by selecting the **Details** button in the **Add radio to site** page or the **Configure site** page in the step-to-step configuration.

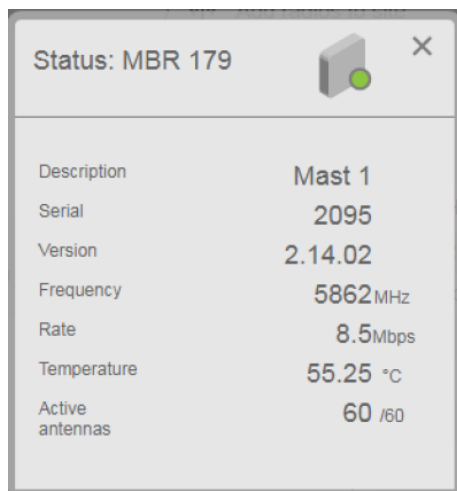

#### Details

##### Description

This is the description of the location of the current Radio Unit.

##### Serial

This is the serial number of the Radio Unit.

##### Version

This is the software version of the Radio Unit.

##### Frequency

This is the operating frequency of the Radio Unit.

**Rate**

This is the configured data rate for the Radio Unit.

**Temperature**

This is the internal temperature of the Radio Unit.

**Active antennas**

This is the number of active antenna elements.

**Related topics**

[Add radios to site, page 39](#)

[Configure site, page 40](#)

[Checking the product version, page 61](#)

# Edit network

**Edit network** allows you to edit the wireless network.

**How to open**

This dialog box is opened from the **System** menu.

Site	Resource distribution
MS Vessel (You)	50%
MS Boat	50%

**Details**

**Network**

This is the name of the current wireless network.

**Open resource**

It shows the percentage of the bandwidth which is an open resource. Open resource is a contention-based multiple access protocol which allows radio sites to communicate without having a fixed allocated time slot.

**Add by site ID**

You can add a radio site to the site list of the network by typing the site ID for the remote site.

**Site list and resource distribution**

They show all sites in the current network with the same network name and the resource distribution between the radio sites.

**Resource management**

This button opens the **Resource management** dialog box. This is where you can change the resource distribution between the radio sites.

**Related topics**

[Editing an existing radio network, page 23](#)

[Resource management, page 45](#)

## Resource management

**Resource management** allows you to change the resource distribution between the radio sites in the radio network.

**How to open**

This dialog box is opened from the **Edit network** dialog box.

Resource management

Superframe length [ms]

50

Open resource [%]

0

Site		Resource distribution [%]		Rate [Mbps]	Bandwidth [Mbps]
MS Vessel (You)	<div></div>	50	<div></div>	8.5	4.25
MS Boat	<div></div>	50	<div></div>	1.4	0.70

Cancel

OK

Details

Superframe length

This is the length of the repeating superframe of bandwidth allocation in milliseconds.

Open resource

It shows the percentage of the bandwidth which is an open resource. Open resource is a contention-based multiple access protocol which allows radio sites to communicate without having a fixed allocated time slot.

Site list and resource distribution

They show all sites in the current network with the same network name and the resource distribution between the radio sites.

Rate

This is the operating data rate of the radio site.

Bandwidth

It shows the bandwidth of the radio site for the selected resource distribution and the data rate.

Related topics

- [Editing an existing radio network, page 23](#)
- [Edit network, page 44](#)




## Join network

The **Join network** dialog box allows you to join an existing MBR network (Maritime Broadband Radio) by typing the network name.

### How to open

This dialog box is opened from the **System** menu.

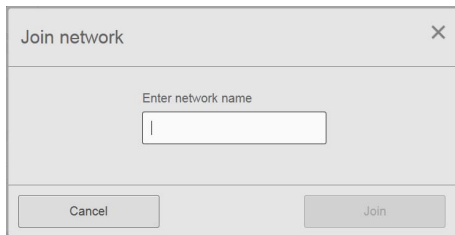

### Details

#### Enter network name

This is the name of the wireless network you want to join. The wireless network name is in upper case.

### Related topics


[Joining a wireless network, page 22](#)

## Crypto key configuration

The MBR link crypto encrypts the wireless link with the use of 56-bit symmetrical keys. The same crypto key must be entered on all radios in the same wireless network so the radios can communicate with each other.

### How to open

Select the **Crypto** button on the **System** menu to open the dialog box.

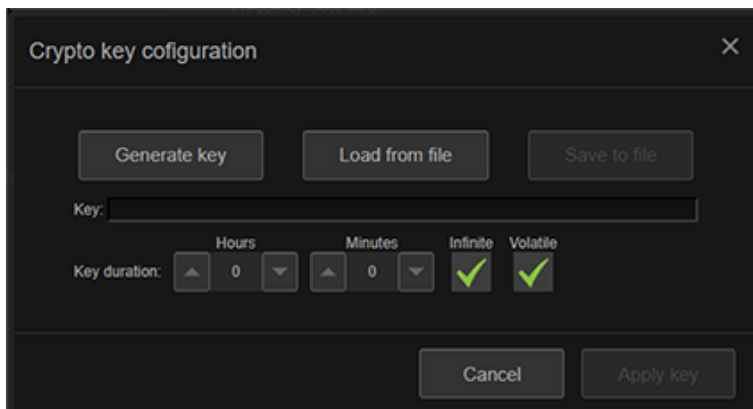

## Details

### Generate key

Select this button to generate a new crypto key.

### Load from file

Select this button if you want to upload a crypto key from a text file.

### Key

Here you can type the crypto key manually.

### Save to file

Select this option if you want to save a crypto key to a text file.

### Key duration

Here you can set a specific duration for the crypto key.

### Infinite, Volatile


If you select **Infinite**, the key has no expiry date. If you select **Volatile**, the key is not active after the next power cycle.

## Related topics

[Enabling the embedded MBR link crypto, page 26](#)

## System status

The **System status** shows the status for the local radio site. The status is **Active** when the radio site is configured. The status is **Not configured** when the radio site is not configured.

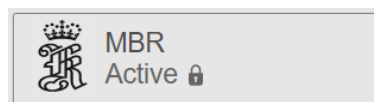

The **System status** is located to the left in the **Main** view.


The padlock symbol indicates that a crypto key has been enabled.

## Related topics

[Checking the status of the MBR network, page 27](#)

## Network status

The **Network status** shows the current network name and the frequency of the network. The Network status is located to the left in the **Main** view.

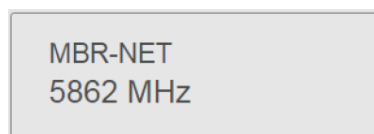

## Related topics

[Checking the status of the MBR network, page 27](#)


## Individual radio site status

The **Site list** contains information about each radio site in the network. Both for local and remote radio sites.

The **Site list** is located to the left in the **Main** view.


### Local radio site

The site name for the local radio site is displayed.  
**BW** indicates the bandwidth resource allocated to the local site. The **Usage** bar indicates the usage of the bandwidth resource.

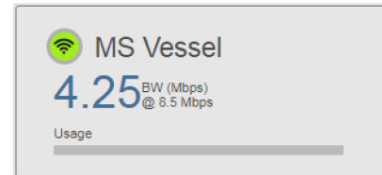

### Remote radio site

The site name for the remote radio site(s) is displayed.  
**BW** indicates the bandwidth resource allocated to the remote site. The signal strength bar indicates the signal strength of each local site.

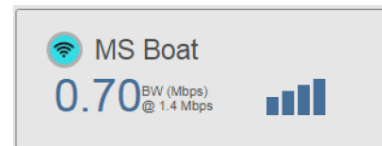

### Related topics

[Checking the status of the MBR network, page 27](#)

# Installation

## Topics

[Preparations, page 50](#)

[Installing the Radio Unit, page 51](#)

[Cable layout and interconnections, page 53](#)

[Setting to work summary, page 53](#)

## Preparations

### Topics

[Mechanical drawings, page 50](#)

[Necessary tools and equipment, page 51](#)

[Radio Unit location, page 51](#)

### Mechanical drawings

Outline dimension drawings are included in this manual.

Unless otherwise specified, all measurements are in millimetres. The drawings are not to scale.

### Related topics

[Radio Unit dimensions, page 55](#)

## Necessary tools and equipment

We assume that you are equipped with a standard set of tools. This tool set must comprise the normal tools for electronic and electromechanical tasks. This includes different screwdriver types, pliers, spanners, a cable stripper, a soldering iron, etc. Each tool must be provided in various sizes. We recommend that all tools are demagnetized to protect your equipment.

Unless otherwise stated, all mounting hardware (such as bolts, nuts, washers, screws etc.) referred to in this document is to be supplied by the customer or the shipyard.

An external computer is required for configuration of the Radio Unit through a web interface. You also need a computer if you want to change the configuration later.

## Radio Unit location

Correct location of the Radio Unit is important for the system performance. Consider these factors when installing the unit.

- Mount the unit in a suitable location where the radio signals will not be obstructed. The antennas in the Radio Unit have a 360-degree operational sector.
- Place the Radio Unit as high as possible above sea level. A suitable location can be in the top of a mast.
- Use a stable power source with correct voltage.

### Related topics

[Installing the Radio Unit, page 51](#)


## Installing the Radio Unit

The Radio Unit is designed to be mounted on a rail or similar. The unit is omnidirectional.

### Context

The Radio Unit is designed for installation on small manned or unmanned vessels. The unit has an integrated bracket for installation on vertical or horizontal rails. The rails can have a diameter of 28 - 32 mm.

The Radio Unit is connected to external equipment with the Ethernet end of the combined Ethernet and power cable. This cable is attached to the Radio Unit by a connector.

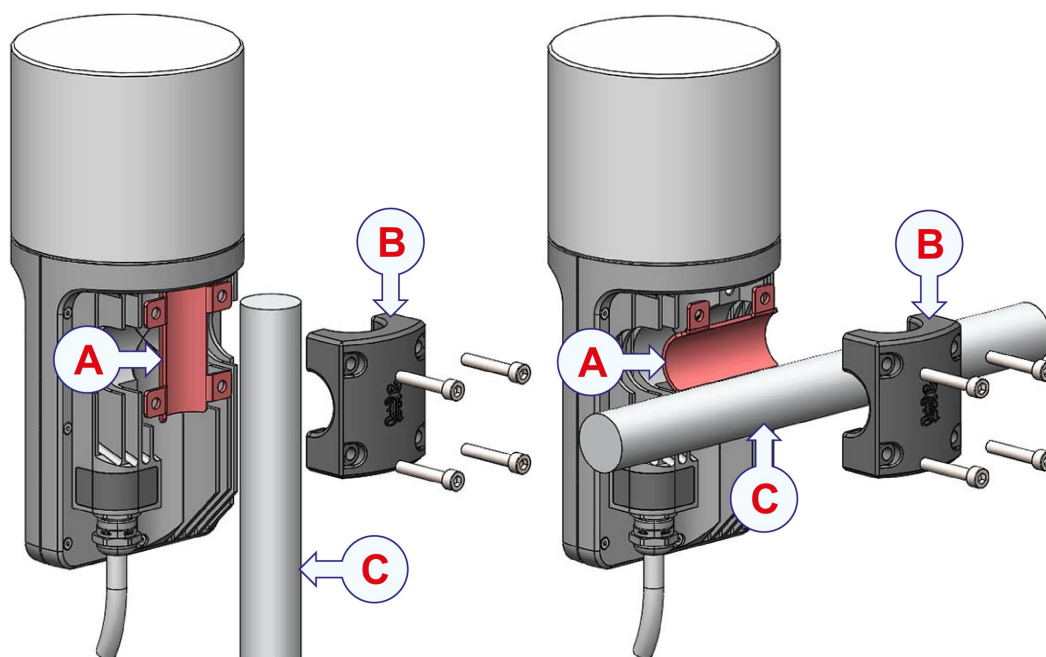

- A** *Insulation shim*  
**B** *Clamping bracket*  
**C** *Rail, 28 mm – 32 mm*

### Procedure

- 1 Find a suitable location for the Radio Unit according to your environment.
- 2 Remove the clamping bracket from the Radio Unit by unscrewing the four screws.
- 3 Place the insulation shim in the correct position depending on if you want vertical or horizontal rail mount.
- 4 Place the Radio Unit on the rail.
- 5 Refasten the clamping bracket.
- 6 Connect the Combined Ethernet and power cable to the connector on the Radio Unit.
- 7 Connect the Ethernet end of the cable to the user equipment.
- 8 Connect the power end of the cable to a power source on the vessel.

### Related topics

[Radio Unit dimensions, page 55](#)

[Radio Unit location, page 51](#)

## Cable layout and interconnections

The cable connections for the Radio Unit consists of:

- Combined Ethernet and power cable from the Radio Unit to user equipment.

### Combined Ethernet and power cable

Cable colours	Signal
Orange	ETH Orange
Orange/White	ETH Orange/White
Green	ETH Green
Green/White	ETH Green/White
Brown	DC+
Brown/White	DC+
Blue	DC-
Blue/White	DC-
Cable screen	Ground

## Setting to work summary

When all hardware units have been installed, and all the cables have been connected, the Radio Unit can be turned on and set to work.

### Procedure

- 1 Turn on the Radio Unit.
- 2 Enable contact with the Radio Unit.
- 3 Configure the radio site.
- 4 Join a radio network.

### Related topics

[Turning on the Radio Unit, page 14](#)

[Enabling contact with the Radio Unit, page 15](#)

[Defining the IP address on the computer's network adapter, page 16](#)

[Setting up the radio site for operation, page 18](#)

[Joining a wireless network, page 22](#)

# Drawings

## Topics

[About drawings, page 54](#)

[Radio Unit dimensions, page 55](#)


## About drawings

These drawings are for information and planning purposes only.

Unless otherwise specified, all measurements are in millimetres. The drawings are not to scale.



## Radio Unit dimensions

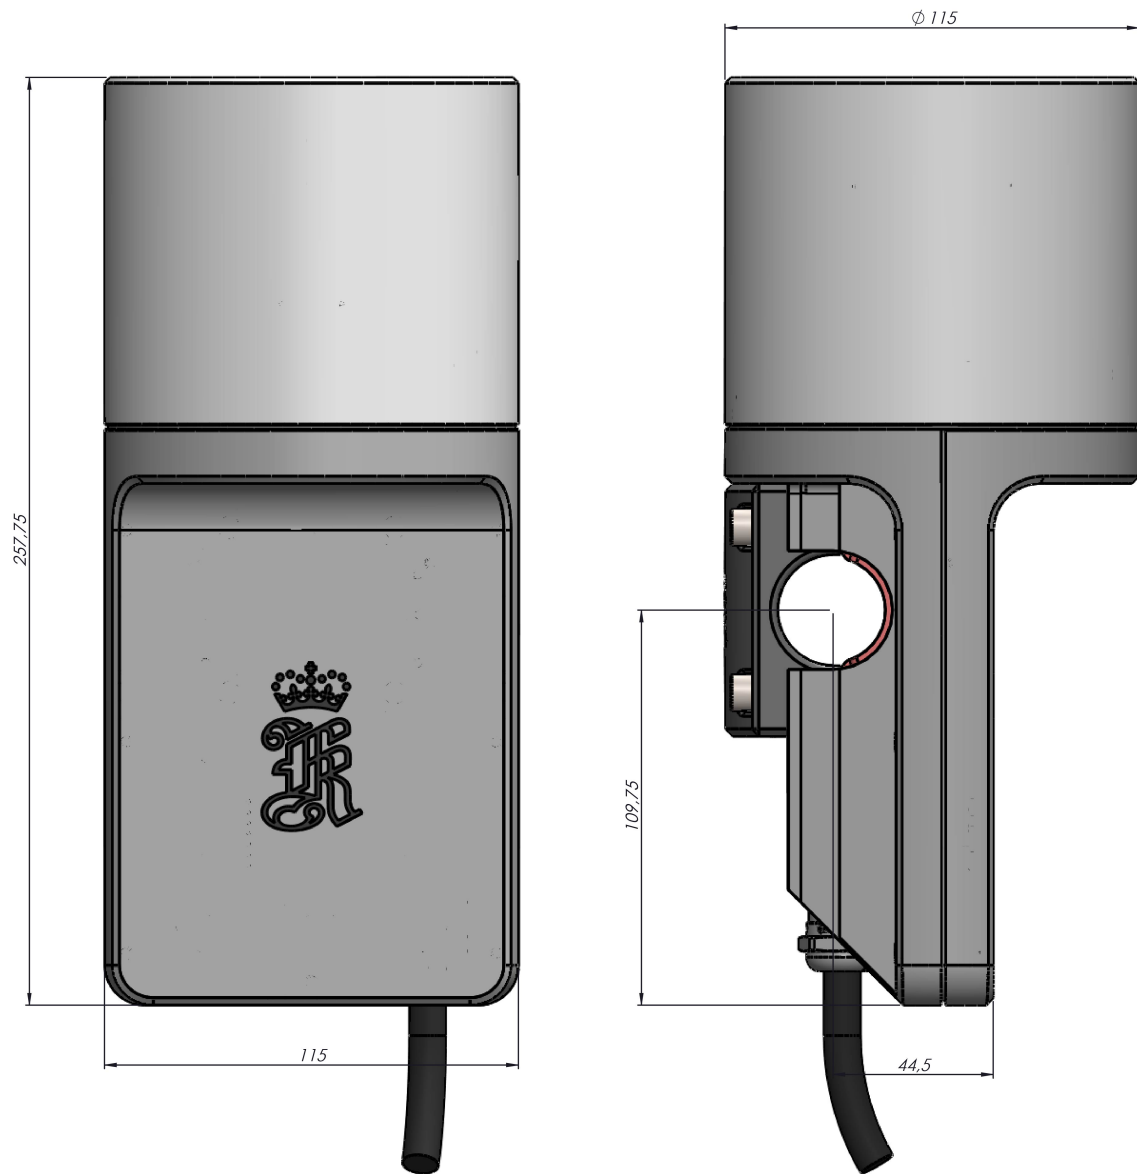

# Technical specifications

## Topics

[Performance specifications, page 56](#)

[Interface specifications, page 56](#)

[Environmental specifications, page 57](#)

[Weights and outline dimensions, page 57](#)

[Power specifications, page 57](#)

[Frequency specifications, page 58](#)

[Standards and regulations, page 58](#)

[Manufacturer's conformity declaration, page 60](#)

## Performance specifications

These performance specifications summarize the main functional and operational characteristics of the MBR 144.

- **Operating range:** 20 km (Dependent on antenna placement and height).
- **User data:** 0.7 – 16.5 Mbps
  - Available rates: 0.7, 1.4, 2.8, 8.5, 16.5 Mbps
- **Antenna coverage:** 360 degrees azimuth, omnidirectional

## Interface specifications

The system will interface with external systems and sensors via Ethernet.

- **Ethernet/LAN:** 1 Port

## Environmental specifications

These environmental specifications summarize the temperature and humidity specifications for the MBR 144.

- **Enclosure material:** Coated aluminium, UV resistant plastic
- **Operating temperature:** -40 °C – 55 °C
- **Operating humidity:** 20 – 100 % RH
- **Storage humidity:** 20 – 70 % RH
- **Ingress protection (IP) code:** IP66

## Weights and outline dimensions

These weights and outline dimension characteristics summarize the physical properties of the MBR 144.

- **Outline dimensions:**
  - **Circumference:** 115 mm
  - **Height:** 260 mm
- **Weight:** 2.5 kg

## Power specifications

These power characteristics summarize the supply power requirements for the MBR 144 system.

- **Voltage:** 24 V DC
- **Power consumption:** 25 W (Maximum)
- **Idle:** 7 W

## Frequency specifications

The radio frequency specifications summarize the frequency specifications for the receivers in the system.

- **Frequency range:**
  - **Frequency overall tuning range:** 4900 MHz - 5900 MHz  
Configurable range for the single 20 MHz channel.
  - **Frequency range ETSI EN 303 276:** 5852 and 5890 MHz
  - **Frequency range FCC part 15.407:** 5725 – 5850 MHz
- **Channel bandwidth:** 20 MHz
- **TX power:**
  - **HW Maximum:** Up to 2 W
  - **ETSI EN 303 276:** Up to 2 W
  - **FCC part 15.407:** Up to 1 W
- **Maximum EIRP:**
  - **HW Maximum:** 41 dBm
  - **ETSI EN 303 276:** 41 dBm
  - **FCC part 15.407:** 36 dBm
- **Modulation:** GMSK
- **Antenna gain:** 8 dBi
- **Antenna elements:** 4

### Related topics

[Radio frequency license, page 10](#)

## Standards and regulations

This product is in compliance with relevant directives and product standards.

- **Radio Equipment Directive (RED) 2014/53/EU:**
  - Electromagnetic compatibility:
    - \* ETSI EN 301 843-1
    - \* ETSI EN 301 843-7
    - \* IEC 60945/EN 60945
  - Radio spectrum:
    - \* ETSI EN 303 276

- Product safety:
  - \* IEC 61010–1/EN 61010–1
- **Environmental standards:**
  - IEC 60945/EN 60945
  - DNVGL-CG-0339
  - IACS E10
- **Radiation hazard standards:**
  - EN 50385

## Manufacturer's conformity declaration

This product is in compliance with relevant directives and product standards.



KONGSBERG

### EU DECLARATION OF CONFORMITY

Manufacturer's name: **Kongsberg Seatex AS**  
Manufacturer's address: **Havnegata 9, N-7010 Trondheim, Norway**

**declares that the product:**

Product name: **Maritime Broadband Radio, MBR**  
Model number: **MBR 144**

is in conformity with the **Radio Equipment Directive, RED, 2014/53/EU** and with reference to ETSI guide **ETSI EG 203 367**, using relevant sections of the following product standards:

Essential requirements	Standards
Health and Safety (Article 3.1(a))	<b>EN 61010-1:2010/IEC 61010-1:2010</b>
EMC (Article 3.1(b) (Radio))	<b>EN 301 843-1 V2.2.1, EN 301 843-7 V1.1.1</b>
Spectrum (Article 3.2)	<b>EN 303 276 V1.1.1 (MBR)</b> <b>EN 303 413 V1.1.1 (GNSS receiver)</b>

Further, the product is compliant to RoHS Directive **2011/65/EU** with reference to standard **EN 50581:2012**.

**Test references**

Technical File: MBR\_144\_TCF; issued by Kongsberg Seatex AS.

Date and signature  
2018-08-08

  
\_\_\_\_\_  
Arne Rinnan, CTO

# Maintenance

## Topics

[Checking the product version, page 61](#)

[Cleaning the Radio Unit cover, page 61](#)

[Repairing the Radio Unit, page 62](#)

## Checking the product version

For software updates, or contact with customer support, it is useful to know the product version of the Radio Unit.

### Procedure

- 1 On the **System** menu, select **Site** to enter the **Configure site** page.
- 2 Under **Radios**, select the **Details** button for the radio for which you want to see the product version.  
Observe that the radio **Status** box appears. Here you can see both the serial number and the product version of the Radio Unit.
- 3 Close the dialog box by selecting **[X]** in the upper-right corner.

### Related topics

[Status, page 43](#)

## Cleaning the Radio Unit cover

The Radio Unit is designed to withstand the elements. Such as rain, snow and dust. However, to ensure optimal performance you must keep the surface of the Radio Unit clean. Brush off any ice or snow.

## Repairing the Radio Unit

The Radio Unit is not designed for repair in the field. All repairs and modifications of the unit, except for installation of new software versions and system setup, must be done by qualified personnel. A failed Radio Unit should be shipped back to Kongsberg Seatex AS or other agreed service point for repair.

### **Related topics**

[Support information, page 13](#)



# Equipment handling

## Topics

[Taking delivery, page 63](#)

[Unpacking and handling, page 63](#)

[Storage, page 64](#)

[Disposal, page 64](#)

## Taking delivery

When the equipment arrives at its destination:

- Perform an inspection immediately to register any damage that may have occurred in transit.
- If you find any damage, both the insurance company and the shipping agent must be informed immediately.

## Unpacking and handling

Care should be taken when unpacking and handling the equipment. A visual inspection should be made to check that the equipment has not been damaged during shipment and that all components and parts are present according to the packing list.

The equipment contains delicate electronic components – handle with care and avoid shocks.

The equipment can be lifted by hand.


## Storage

After the equipment in the boxes has been inspected and it has been verified that no damage has occurred, the equipment must be stored in its original packaging until the time of installation. The storage premises must be dry and well protected.

## Disposal

At the end of the product lifetime, all Kongsberg Seatex AS products must be disposed of in an environmentally-friendly way.

All electrical and electronic components must be disposed of separately from the municipal waste stream via designated collection facilities appointed by the government or local authorities. The correct disposal and separate collection of your old appliance will help prevent potential negative consequences for the environment and human health. This is a precondition for reuse and recycling of used electrical and electronic equipment. For more detailed information about disposal of your old appliance, please contact your local authorities or waste disposal service.

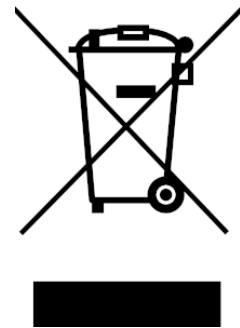

All disposal of mechanical, electromechanical, electronic and chemical waste - including all types of batteries - must take place according to national and international rules and regulations. Observe the relevant Waste Electrical and Electronic Equipment (WEEE) regulations.

The equipment can be returned to Kongsberg Seatex AS if there is no local WEEE collection. The equipment is marked with this waste pictogram.

# Index

## A

about	
maintenance .....	7
product license .....	7
target audience .....	7
this publication .....	7
Add radios to site dialog box	
description .....	39
adding equipment .....	25
additional required items	
not provided with the delivery .....	10

## B

basic items	
provided with the delivery .....	10
box	
radio Status box description .....	43

## C

checking individual site status .....	27
checking network status .....	27
checking system status .....	27
choosing display colour palette .....	28
cleaning Radio Unit housing .....	61
colour palette	
how to choose .....	28
configuration	
set up radio site for operation .....	18
Configuration guide dialog box	
description .....	37
Start button .....	38
Configuration Wizard page	
description .....	37
Configure site dialog box	
description .....	40
conformity declaration	
Radio Unit .....	60
connecting	
external devices .....	51
Create site dialog box	
description .....	38
crypto key	
setting .....	26
crypto key configuration dialog box	
description .....	47

## D

description	
Add radios to site dialog box .....	39
Configuration guide dialog box .....	37
Configuration Wizard page .....	37
Configure site dialog box .....	40
Create site dialog box .....	38
crypto key configuration dialog box .....	47
Edit network dialog box .....	44
Join network dialog box .....	47
Local Host List dialog box .....	42

Local radio site status dialog box .....	49
Local Site view .....	33
Network Overview view .....	31
Network status dialog box .....	48
radio Status box .....	43
Remote radio site status dialog box .....	49
Resource management dialog box .....	45
system .....	8
System menu .....	36
System Overview view .....	32
System status dialog box .....	48
diagram	
system .....	9
dialog box	
Add radios to site dialog box description .....	39
Configuration guide dialog box description .....	37
Configure site dialog box description .....	40
Create site dialog box description .....	38
crypto key configuration .....	47
Edit network dialog box description .....	44
Join network dialog box description .....	47
Local Host List dialog box description .....	42
Local radio site status dialog box description .....	49
Network status dialog box description .....	48
Remote radio site status dialog box	
description .....	49
Resource management dialog box	
description .....	45
System status dialog box description .....	48
dialog boxes	
System menu .....	36
dimensions	
Radio Unit .....	55
display	
colour palette .....	28
how it is organised .....	29
display organisation .....	29
disposal	
of equipment .....	64

## E

Edit network dialog box	
description .....	44
editing existing radio network .....	23
enabling contact with Radio Unit .....	15
environmental specifications	
Radio Unit .....	57
equipment	
disposal .....	64
how to add or remove .....	25
storage .....	64
taking delivery .....	63
unpacking .....	63
WEEE waste handling .....	64
equipment handling .....	63
Ethernet and power cable	
pin layout .....	53
Ethernet interface	
network adapter .....	16

## **F**

FCC identification number .....	11
frequency	
radio frequency interference .....	11
specifications .....	58
functions	
System menu .....	36

## **G**

guarantee	
restrictions .....	10

## **H**

handling	
WEEE waste .....	64
hazard	
radiation hazard .....	12
health, safety, environment .....	12
how to	
add or remove equipment .....	25
check individual site status .....	27
check network status .....	27
check system status .....	27
clean Radio Unit housing .....	61
connect external devices .....	51
edit existing network .....	23
enable contact with Radio Unit .....	15
find product version .....	61
install Radio Unit .....	51
join a wireless network .....	22
repair Radio Unit .....	62
set the crypto key .....	26
set up radio site for operation .....	18
turn on Radio Unit .....	14
how to open	
System menu .....	36

## **I**

identification	
FCC .....	11
Industry Canada (IC) .....	11
individual site status	
how to check .....	27
Industry Canada (IC) identification number .....	11
information	
support .....	13
installing	
Radio Unit .....	51
interference	
radio frequency .....	11
internet	
network security .....	12
IP address	
network adapter .....	16
IP Address	
network adapter .....	16

## **J**

join network	
how to .....	22

Join network dialog box	
description .....	47

## **K**

Kongsberg Seatex AS	
support .....	13

## **L**

license	
product license .....	7
radio frequency .....	10
Local Host List dialog box	
description .....	42
Local radio site status dialog box	
description .....	49
Local Site view	
description .....	33
location	
Radio Unit .....	51

## **M**

main items	
provided with the delivery .....	10
maintenance .....	7
MBR 144	
system diagram .....	9
menu	
System menu description .....	36
System menu functions and dialog boxes .....	36

## **N**

network	
how to edit existing network .....	23
network adapter	
IP Address .....	16
IP address for transceiver communication .....	16
Subnet mask .....	16
Network Overview view	
description .....	31
network security .....	12
network status	
how to check .....	27
Network status dialog box	
description .....	48

## **O**

open	
System menu .....	36
operation	
joining a wireless network .....	22
operational principles .....	29

## **P**

page	
Configuration Wizard page description .....	37
pages	
System menu .....	36
performance	

specifications .....	56	Resource management dialog box	
pin layout		description .....	45
Ethernet and power cable .....	53	restrictions	
power		guarantee .....	10
specifications .....	57	<b>S</b>	
power specifications		safety	
Radio Unit .....	57	product safety .....	12
procedure		scope of supply	
adding or removing equipment .....	25	basic items .....	10
checking individual site status .....	27	required items not provided with the delivery .....	10
checking network status .....	27	security	
checking system status .....	27	network .....	12
connect peripheral equipment .....	51	setting	
editing existing network .....	23	crypto key .....	26
enabling contact with Radio Unit .....	15	setting to work	
how to choose colour palette .....	28	summary .....	53
how to find product version .....	61	Setting to work summary .....	53
installing Radio Unit .....	51	software	
interfacing external devices .....	51	version .....	7
joining a wireless network .....	22	specification	
repairing Radio Unit .....	62	environmental Radio Unit .....	57
setting the crypto key .....	26	power Radio Unit .....	57
setting up radio site for operation .....	18	specifications	
turning on Radio Unit .....	14	frequency .....	58
product		performance .....	56
regulations .....	58	power .....	57
standards .....	58	radio frequency .....	58
product license .....	7	standard items	
product safety .....	12	provided with the delivery .....	10
product version		standard tools	
finding .....	61	installation of system units .....	51
purpose		standards	
this publication .....	7	product standards .....	58
<b>R</b>		Start button	
radiation hazard .....	12	Configuration guide dialog box .....	38
radio frequency		status of individual site	
interference .....	11	how to check .....	27
license .....	10	status of network	
specifications .....	58	how to check .....	27
radio site		status of system	
setup .....	18	how to check .....	27
radio Status box		storage	
description .....	43	of equipment .....	64
Radio Unit		Subnet mask	
conformity declaration .....	60	network adapter .....	16
dimensions .....	55	summary	
environmental specifications .....	57	setting to work .....	53
how to clean .....	61	support	
how to enable contact .....	15	Kongsberg Seatex AS .....	13
how to repair .....	62	support information .....	13
installing .....	51	system	
power specifications .....	57	description .....	8
select location .....	51	diagram .....	9
turning on .....	14	System menu	
regulations		description .....	36
product regulations .....	58	functions and dialog boxes .....	36
Remote radio site status dialog box		how to open .....	36
description .....	49	System Overview view	
removing equipment .....	25	description .....	32
repairing		system status	
Radio Unit .....	62	how to check .....	27
required items		System status dialog box	
not provided with the delivery .....	10	description .....	48

## **T**

taking delivery	
of equipment .....	63
target audience	
this publication .....	7
technical specifications	
performance .....	56
this publication	
about .....	7
purpose .....	7
target audience .....	7
this user manual	
about .....	7
purpose .....	7
target audience .....	7
tools	
installation of system units .....	51
turning on	
Radio Unit .....	14

## **U**

unpacking	
equipment .....	63

## **V**

version	
finding product version .....	61
software .....	7
view	
Local Site .....	33
Network Overview .....	31
System Overview .....	32

## **W**

waste	
handling .....	64
WEEE (Waste Electrical and Electronic Equipment) .....	64



©2022 Kongsberg Seatex