

AIS BS610



KONGSBERG



AUTOMATIC IDENTIFICATION SYSTEM - BASE STATION

The AIS BS610 is a product in the new generation AIS Base Station range from Kongsberg Seatex. It has a sensitivity better than -115 dBm and 1U 19" rack mountable smooth design. The AIS BS610 is designed and tested in accordance with all relevant international standards including IEC 62320-1 and ITU M-1371.

The AIS Base Station is the primary component in an AIS Physical Shore Station (PSS), and therefore the most vital component in a coastal AIS network. The AIS BS610 receives and communicates AIS data from all AIS sources: AIS mobile stations, other AIS Base Stations, AIS Aids to Navigation units, Search and Rescue units etc, within the VHF coverage area.

The AIS system provides a valuable tool to increase the situation awareness, the efficiency of operations and safety. Experience shows that the workload for operators involved in vessel tracking and monitoring is considerably reduced after the introduction of AIS.

Remote configuration and operation

The AIS BS610 has an Ethernet/LAN interface, making it easy to interface the base station to other equipment or data networks. From the AIS Central Monitor Application Suite a single AIS BS610, or a network of base stations, can be remotely operated and maintained. The AIS BS610 also supports configuration and firmware upgrade via a web interface. All base station functions can be configured and effectuated remotely via this interface.

Hot stand-by

In order to obtain a very high level of service and availability, a redundant base station configuration can be established. Two AIS BS610 units will operate autonomously in such a configuration when connecting them with a 0-modem cable and enabling the redundancy functionality. In case of an automatic change in redundancy status, the control centre will be notified.

Sensitivity


Kongsberg Seatex has also developed satellite based AIS receivers and this space-based AIS technology has strong focus on receiver sensitivity. The high sensitivity has been incorporated in the AIS BS610. The increased sensitivity exceeds the requirements in international standards and regulations, and is an incredible enhancement in terms of signal reception.

DGNSS correction distribution

The AIS BS610 is able to broadcast DGNSS corrections through the standardized AIS message 17. Hence, differential corrections can be transmitted to all vessels which carry an AIS mobile station if the vessel is located within the base station's coverage area.

FEATURES

- Sensitivity better than -115 dB
- SNMP v.2
- Optional combined 100 to 240 VAC and 24 VDC (10-36 VDC) version
- Optional combined 100 to 240 VAC and 48 VDC (36-75 VDC) version
- WEB interface for remote configuration and SW upgrade
- RTCM v.2.3 support for reception of DGPS corrections on LAN
- Three remotely configurable receivers (TDMA/DSC)
- USB interface for firmware upgrade
- Transmission of virtual AtoN, implementation of a subset of IEC 62320-2 functionality
- AIS repeater functionality in accordance with IEC 62320-3
- Redundancy support (RS-232)
- Supporting NTP as client and server
- Available auxiliary equipment enabling functionality such as:
 - Separate or combined transmitting and receiving antennas
 - Remotely controlled hard power reset of PSS equipment
 - DGNSS reference and monitor stations
 - Supporting 10 parallel consecutive TCP connections

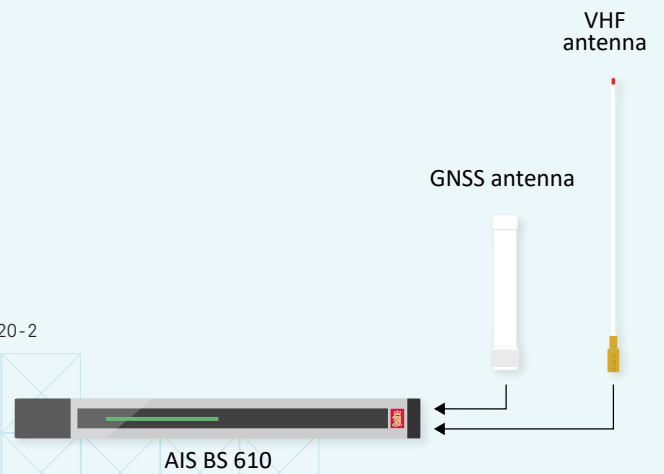

TECHNICAL SPECIFICATIONS

AIS BS610

INTERFACES

Communication ports	Service and redundancy, RS-232
Message formats	NMEA
LAN	100 Mbs BaseT Ethernet

RADIO MODULE

VHF transmitter	12.5 W or 1 W (remotely switchable)
Sensitivity	Better than -115 dBm
Bandwidth	25 kHz
Frequencies	156.025 to 162.025 MHz Default Ch. 87B (161.975 MHz) Default Ch. 88B (162.025 MHz)
Protocol	FATDMA

GNSS MODULE

GNSS receivers	50 channels
----------------	-------------

WEIGHT AND DIMENSIONS

AIS Unit	3 kg, 44 mm x 485 mm x 345 mm
AIS Unit 24 V DC	3.3 kg, 44 mm x 485 mm x 345 mm
GNSS antenna	0.15 kg, 230 mm x 33 mm
VHF antenna	1.0 kg, 1250 mm

POWER SPECIFICATIONS

AIS Unit	100 to 240 V AC (50 to 60 Hz)
AIS Unit 24 V DC	Optional combined 100 to 240 V AC and 24 V DC
AIS Unit 48 V DC	Optional combined 100 to 240 V AC and 48 V DC
AIS Unit power consumption	Average 9 W, peak 39 W
GNSS antenna	5 V DC from AIS Unit

ENVIRONMENTAL SPECIFICATIONS

Operating temperature range

AIS Unit	-15 to +55 °C
GNSS antenna	-50 to +70 °C
VHF antenna	-55 to +70 °C

Humidity

AIS Unit	< 95 % relative, non-condensing
GNSS antenna	100 %, hermetically sealed
VHF antenna	100 %, hermetically sealed

STANDARDS AND REGULATIONS

Electrical safety	EN 60950-1
Electromagnetic compatibility	EN 60945/EN 61000-6-3/6-2
Electrical interface	IEC 61162-1/2
IALA recommendation	A-124
Base station operation	IEC 62320-1:2015
Radio	IEC 61993-2 (clause 15) ITU-R M. 1371-5
MTBF (hours)	>100.000 (designed to meet)

Specifications subject to change without any further notice.

KONGSBERG SEATEX

Switchboard: +47 73 54 55 00
 Global support 24/7: +47 33 03 24 07
 E-mail sales: km.seatex.sales@km.kongsberg.com
 E-mail support: km.support.seatex@km.kongsberg.com

kongsberg.com/maritime



KONGSBERG