
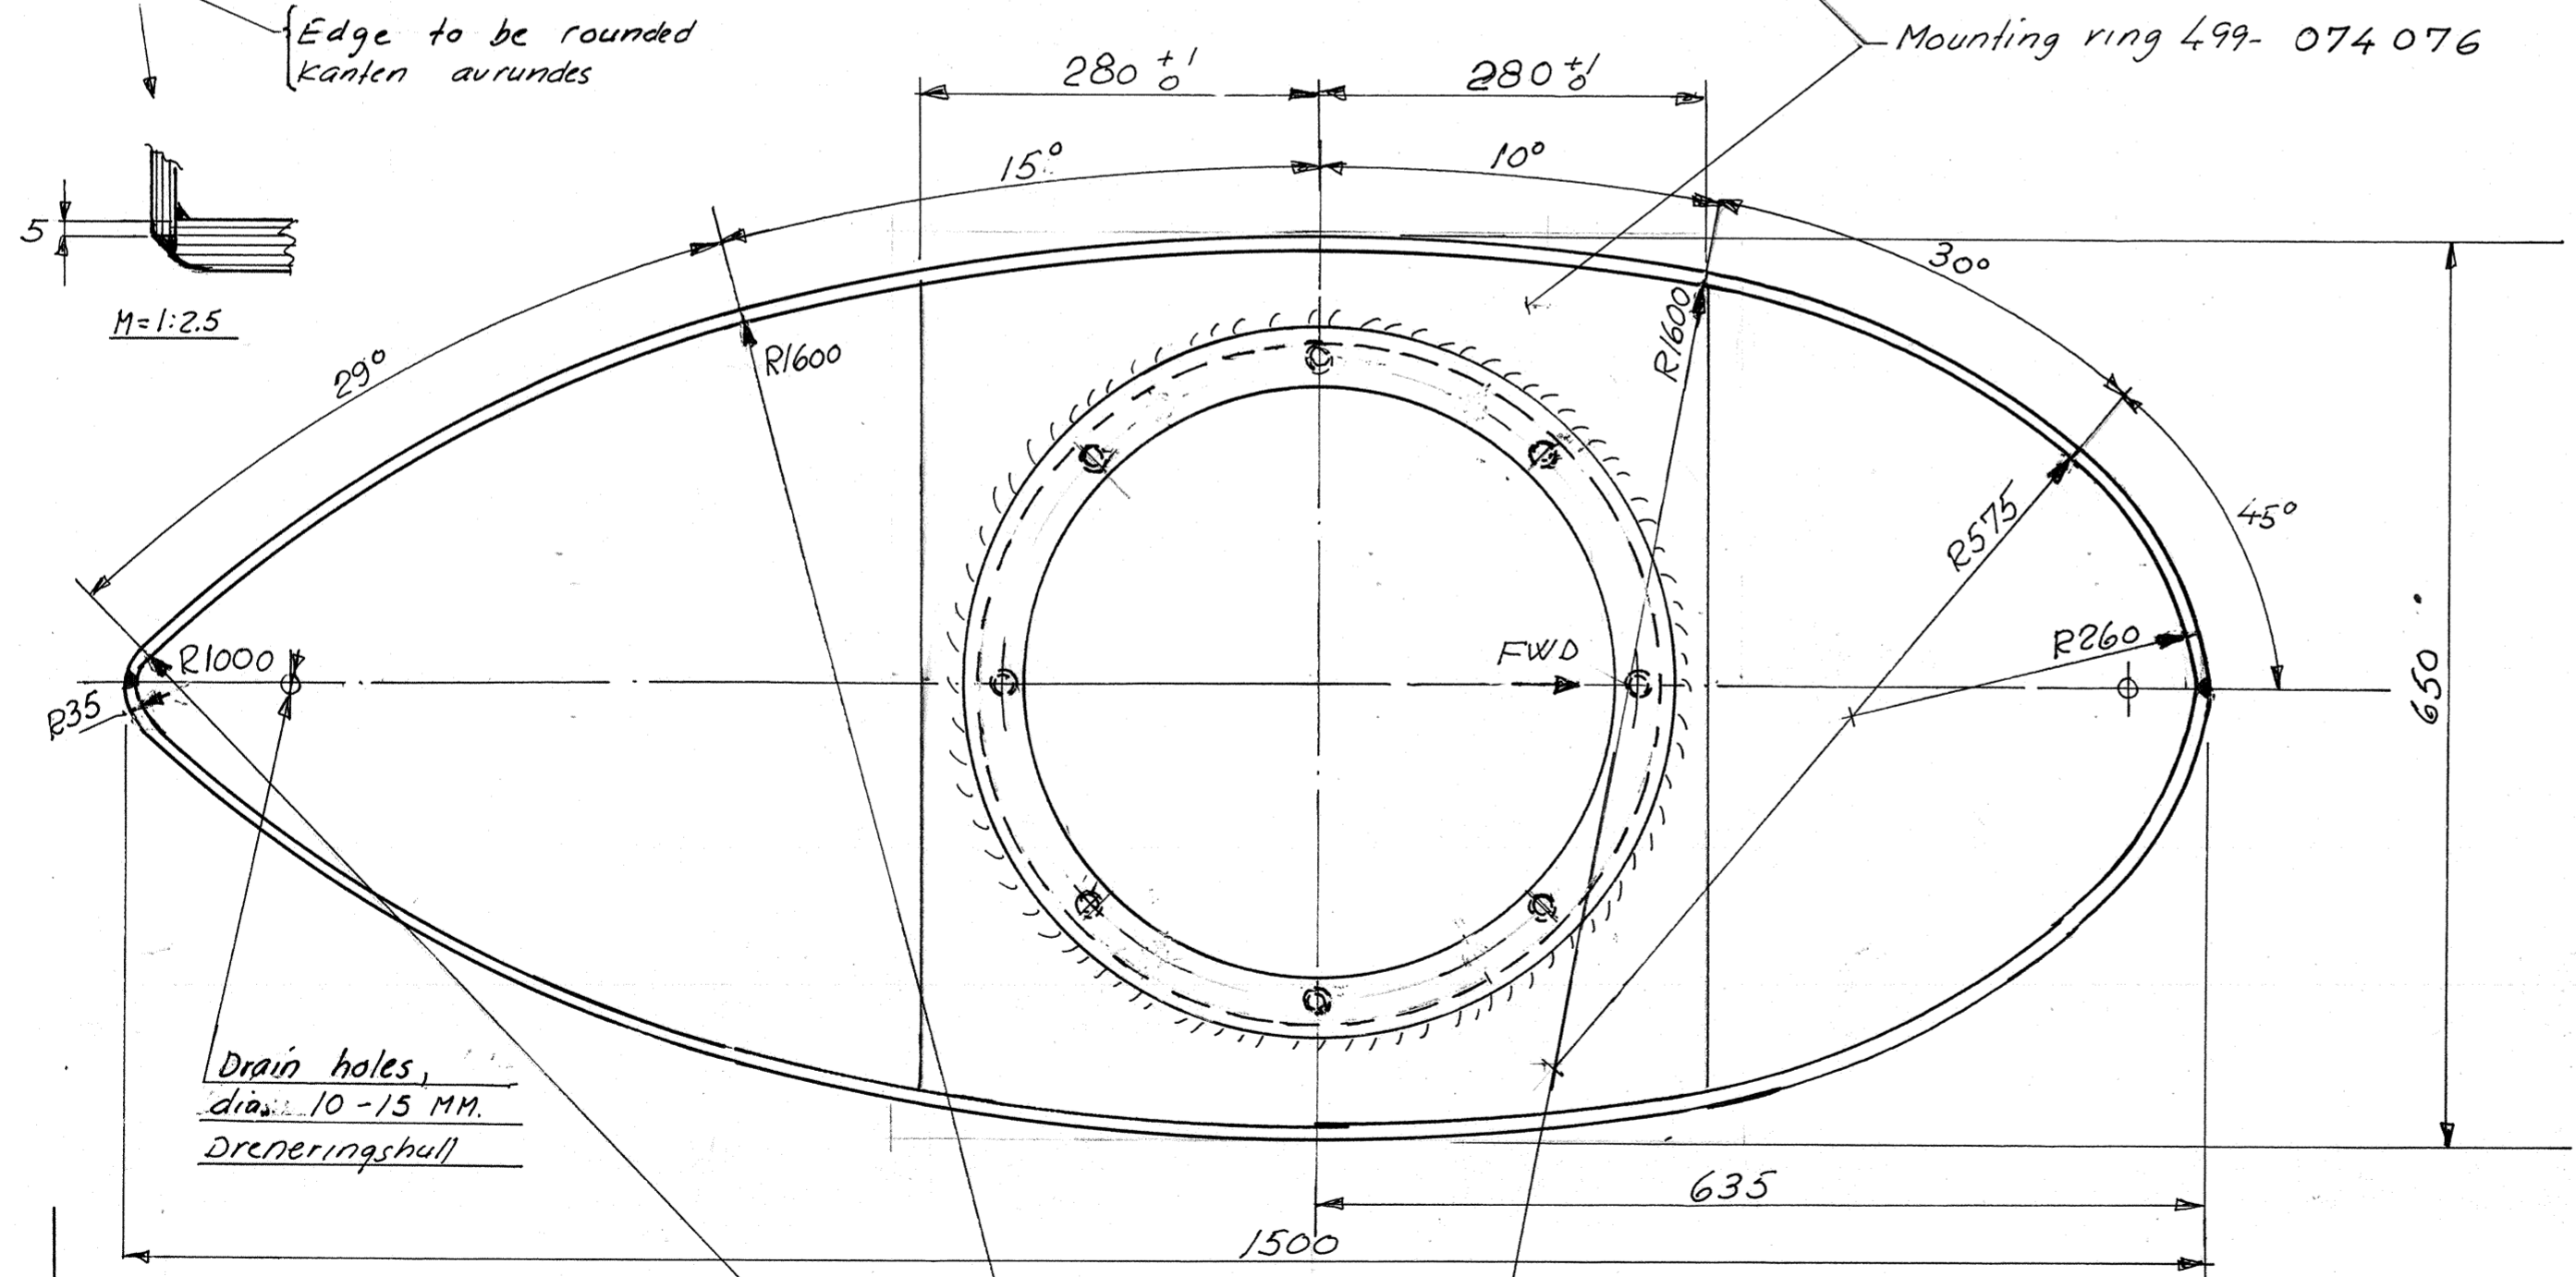
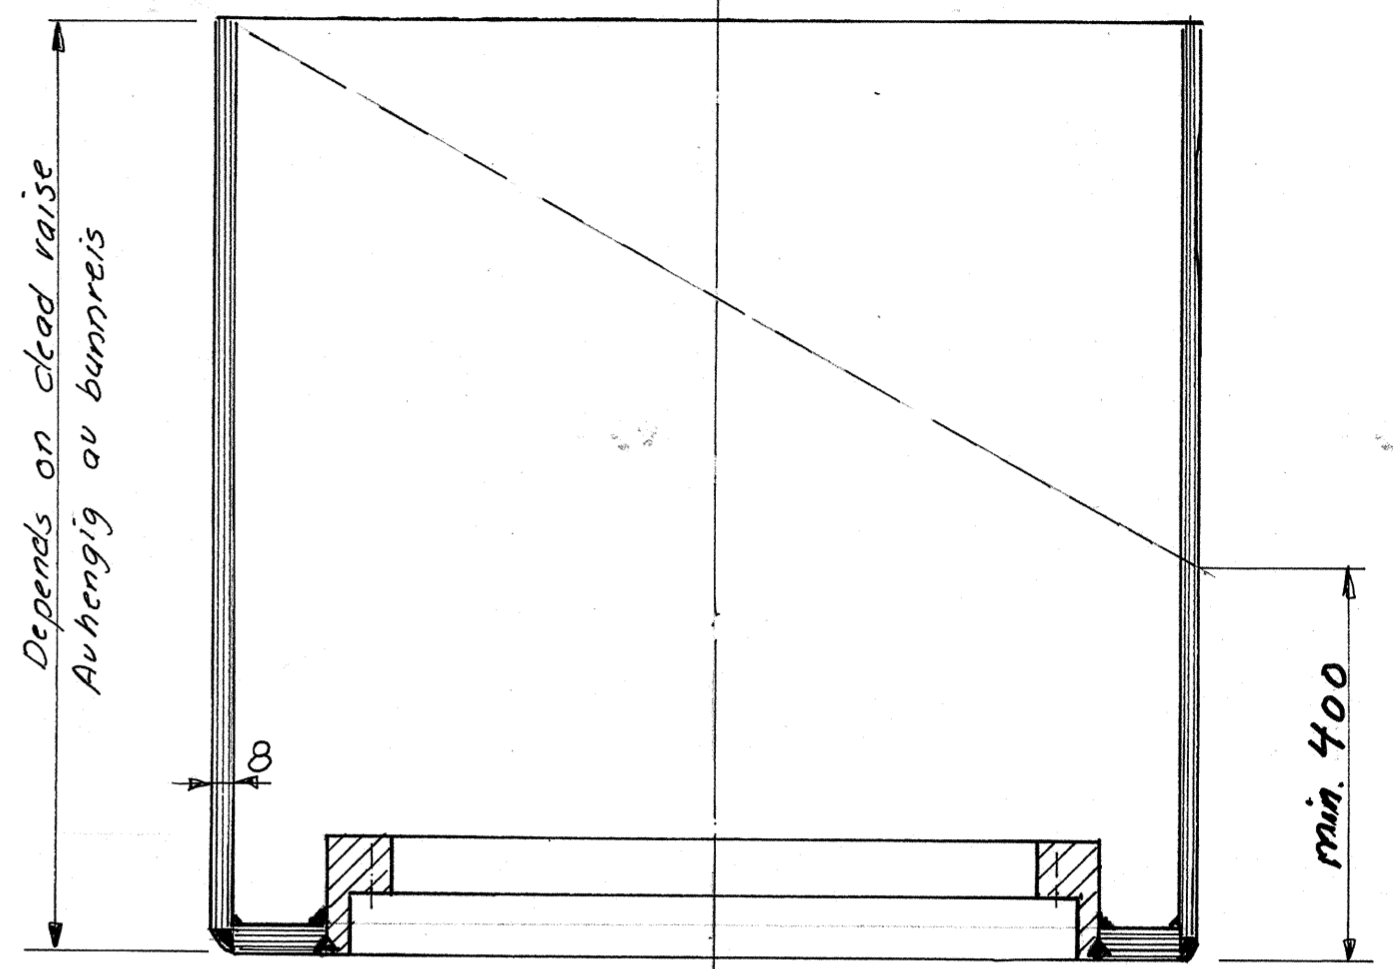


The bottom plane must be completely flat, with no concavity. Maximum 3 mm convexity. Small hollows (maximum 1 mm) will be accepted

Hele bunnpplanet må være plant, ikke konkavt. Konveks inntil 3 mm aksepteres. Mindre synkninger aksepteres inntil 1 mm.

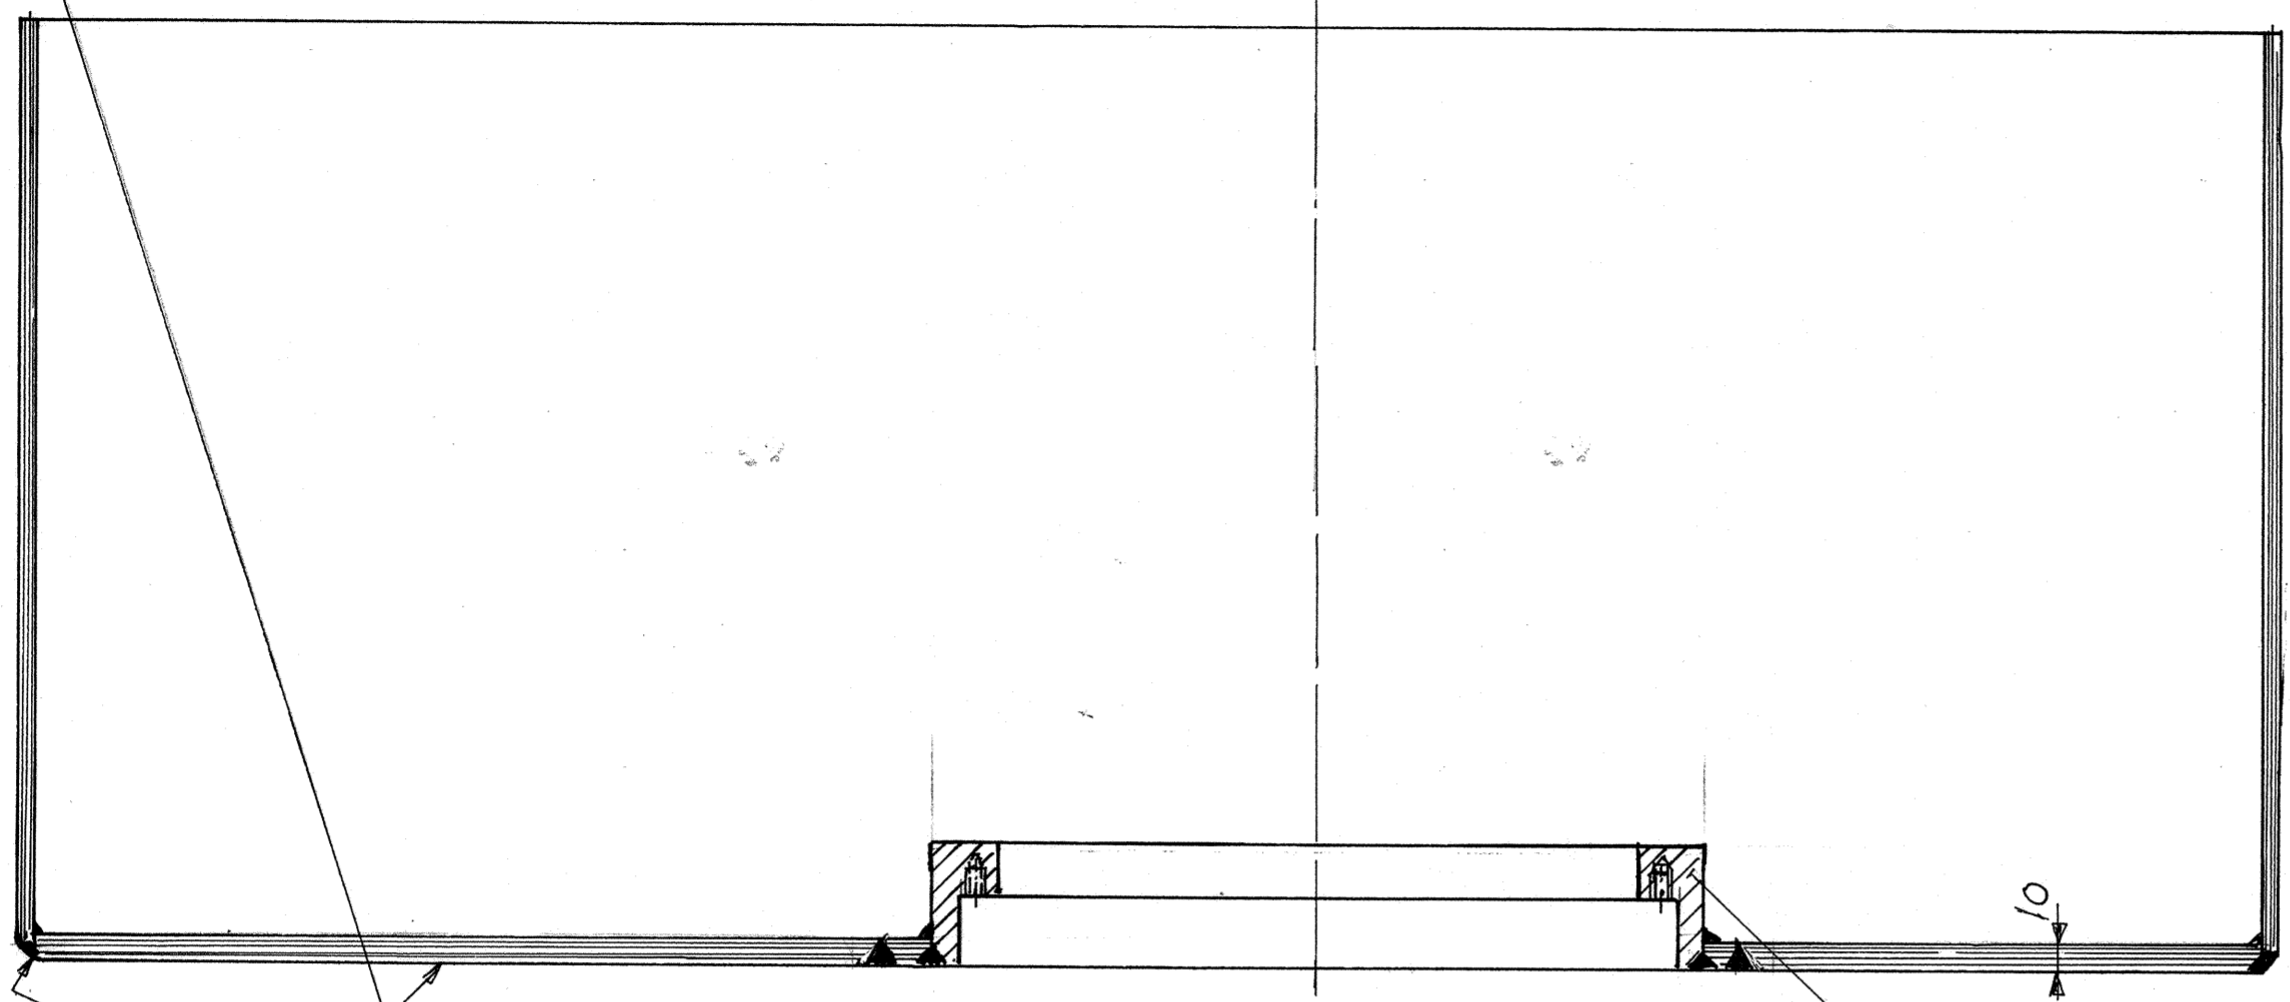

Overflatebehandling:
Sandblåses etter bearbeiding, Sa 2.5
Ett strøk rød jernoksyd primer

Surface treatment:
To be sandblasted after grinding, Sa 2.5
One coat of red ferric oxide primer

NR.	SIGN.
ENDRINGS-MELDING	

Sl. 42.		TOLERANSER FOR IKKE SPESIELT TOLERANSESATTE MÅL: MIDDELS NS 1430		SIMRAD
PROJ. METODE				
MÅLEST.	1:5 (1:25)	Støisko	ERST.	
TEGN.	88.01.12 T.W.	Svinger E538-B	111 - 074 077	
KONTR.	89.08.29 E.E.	Steel blister		
GODKJ.	89.08.29 H	Transducer E538-B	ARKIV NR. 530 - 80	